

Stinger

Stinger[®]

Lead Glass Mat Battery

POWER2

2018

PRODUCT CATALOG



CONTENTS

STINGER X.....3

| | |
|----------------------------|----|
| QUICK REFERENCE GUIDE..... | 4 |
| X3 SERIES..... | 6 |
| X2 SERIES..... | 8 |
| X1 SERIES..... | 10 |

STINGER.....12

| | |
|---------------------------------|----|
| WIRING KITS..... | 13 |
| 6000 SERIES..... | 13 |
| 4000 SERIES..... | 16 |
| QUICK REFERENCE GUIDE..... | 19 |
| SPECIALTY VEHICLES..... | 20 |
| TOTAL PROFIT SYSTEM..... | 22 |
| WIRE..... | 24 |
| POWER WIRE..... | 26 |
| SPEAKER WIRE..... | 28 |
| PRIMARY WIRE..... | 30 |
| INTERCONNECTS..... | 34 |
| 9000 SERIES..... | 35 |
| 8000 SERIES..... | 36 |
| 6000 SERIES..... | 37 |
| 4000 SERIES..... | 38 |
| 1000 SERIES..... | 39 |
| MARINE/ADVENTURE SERIES..... | 40 |
| ROADKILL SOUND DAMPING..... | 42 |
| ULTIMATE..... | 44 |
| EXPERT..... | 45 |
| STEALTH/OVERKILL/KITS..... | 46 |
| WAVE RINGS/FAST RINGS..... | 47 |
| BATTERIES..... | 48 |
| POWER ² SERIES..... | 50 |
| POWER SERIES..... | 52 |
| SPECIALTY VEHICLES..... | 54 |
| CHARGERS/POWER SUPPLY..... | 56 |
| CAPACITORS..... | 58 |
| TERMINALS..... | 59 |
| INSTALLATION ACCESSORIES..... | 59 |
| ISOLATORS/RELAYS/TERMINALS..... | 60 |
| WIRE MANAGEMENT..... | 61 |
| FUSES / FUSE MANAGEMENT..... | 62 |
| POWER INVERTERS..... | 64 |
| FANS / SIGNAL ADAPTERS..... | 66 |
| TEXTILES..... | 67 |

STINGER SELECT.....68

| | |
|-------------------------------------|----|
| INTERCONNECTS..... | 69 |
| WIRING KITS..... | 71 |
| WIRE..... | 73 |
| POWER WIRE..... | 73 |
| SPEAKER WIRE..... | 74 |
| PRIMARY WIRE..... | 75 |
| BATTERIES/CAPACITORS/TERMINALS..... | 76 |
| FUSES / FUSE MANAGEMENT..... | 77 |
| ENCLOSURES..... | 79 |

SPECIALTY.....80

| | |
|-------------------|----|
| V-TWIN..... | 82 |
| MARINE..... | 86 |
| POWER SPORTS..... | 92 |

MERCHANDISING...98



The logo for Stinger X features the word "Stinger" in a bold, italicized, yellow script font. To the right of "Stinger" is a large, stylized yellow "X" that resembles a lightning bolt or a sharp arrowhead. The background is black with a large, abstract yellow shape on the left side that also resembles a lightning bolt or arrowhead, pointing towards the top right. A yellow horizontal bar is positioned below the logo.

Stinger X

PREMIUM AUDIO ACCESSORIES

Stinger X was developed for the professional installer and premier Stinger partners. MAP (minimum advertised price) protection ensures that the retail price you set won't be challenged by your customers, because they won't find it online or anywhere else cheaper. Allowing you to install with trusted accessories, while preserving your margin.



QUICK REFERENCE GUIDE

| | PART NUMBER | CHANNELS | LENGTH | TYPE |
|------------------|-------------|----------|--------------------|----------------------|
| X3 Series | XI3220 | 2 | 20'/6.1m | Audio Interconnect |
| | XI3217 | 2 | 17'/5.2m | Audio Interconnect |
| | XI3212 | 2 | 12'/3.7m | Audio Interconnect |
| | XI326 | 2 | 6'/1.8m | Audio Interconnect |
| | XI323 | 2 | 3'/0.9m | Audio Interconnect |
| | XI32YM | 2 | 2YM | Audio Interconnect |
| | XI32YF | 2 | 2YF | Audio Interconnect |
| | XI3417 | 4 | 17'/5.2m | Audio Interconnect |
| X2 Series | XI2220 | 2 | 20'/6.1m | Audio Interconnect |
| | XI2217 | 2 | 17'/5.2m | Audio Interconnect |
| | XI2212 | 2 | 12'/3.7m | Audio Interconnect |
| | XI226 | 2 | 6'/1.8m | Audio Interconnect |
| | XI223 | 2 | 3'/0.9m | Audio Interconnect |
| | XI221.5 | 2 | 1.5'/0.5m | Audio Interconnect |
| | XI22YM | 2 | 2YM | Audio Interconnect |
| | XI22YF | 2 | 2YF | Audio Interconnect |
| | XI2420 | 4 | 20'/6.1m | Audio Interconnect |
| | XI2417 | 4 | 17'/5.2m | Audio Interconnect |
| | XI2412 | 4 | 12'/3.7m | Audio Interconnect |
| | XI269 | 6 | 9'/2.7m | Audio Interconnect |
| | XI2617 | 6 | 17'/5.2m | Audio Interconnect |
| X1 Series | XI1117 | | 17'/5.2m | Toslink Interconnect |
| | XI116 | | 6'/1.8m | Toslink Interconnect |
| | XI113 | | 3'/0.9m | Toslink Interconnect |
| | XI1220 | 2 | 20'/6.1m | Audio Interconnect |
| | XI1217 | 2 | 17'/5.2m | Audio Interconnect |
| | XI1212 | 2 | 12'/3.7m | Audio Interconnect |
| | XI126 | 2 | 6'/1.8m | Audio Interconnect |
| | XI123 | 2 | 3'/0.9m | Audio Interconnect |
| | XI121.5 | 2 | 1.5'/0.5m | Audio Interconnect |
| | XI12YM | 2 | 2YM | Audio Interconnect |
| | XI12YF | 2 | 2YF | Audio Interconnect |
| | XI1420 | 4 | 20'/6.1m | Audio Interconnect |
| | XI1417 | 4 | 17'/5.2m | Audio Interconnect |
| | XI1617 | 6 | 17'/5.2m | Audio Interconnect |
| | XI1820 | | 20'/6.1m | Video Interconnect |
| | XI1812 | | 12'/3.7m | Video Interconnect |
| XI136 | 2 | 6'/1.8m | Audio Interconnect | |

X3 SERIES



C3 Tech

Continuous Connection Construction (C3 Tech) provides unmatched signal transfer



Dynamic Signal Flow

Dynamic Signal Flow uses finely stranded silver-plated, pure OFC copper to optimize signal vs. frequency interaction for a dynamic listening experience



Lock Tip RCA Connectors

Lock Tip's rotational locking end with Quad-Clamp-Precision 4-cut RCA provides the ultimate in locking and clamping force with unsurpassed connection integrity



Noise Shield Directional Construction

Noise shield directional construction uses 3 tightly twisted conductor bundles (+, -, signal drain) per channel to create a directional noise cancelling architecture




I.D. Interference Defense

I.D. Interference Defense doubles the shielding efforts by combining two layers of EMI rejecting Mylar foil and radiated noise absorbing copper mesh, eliminating unwanted noise and interference



Body Armor

Body Armor Protection utilizes high strength nylon fibers that are woven tightly around the ultra flexible PVC cable integrity when contending with sharp metal, vibration, and moisture

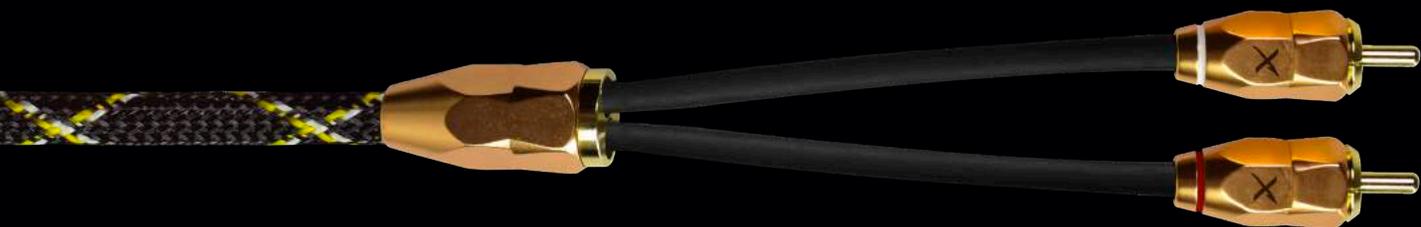

X3 Series Lineup AUDIO INTERCONNECTS

XI3220: 2 Channels, Length: 20Ft/6.1m

XI3217: 2 Channels, Length: 17Ft/5.2m

XI3212: 2 Channels, Length: 12Ft/3.7m


XI326: 2 Channels, Length: 6Ft/1.8m

XI323: 2 Channels, Length: 3Ft/0.9m


XI32YM: 2 Channels, Y- 2 Male, 1 Female

XI32YF: 2 Channels, Y- 2 Female 1 Male

XI3417: 4 Channels, Length: 17Ft/5.2m



Rotational locking end with Quad-Clamp-Precision 4-cut RCA

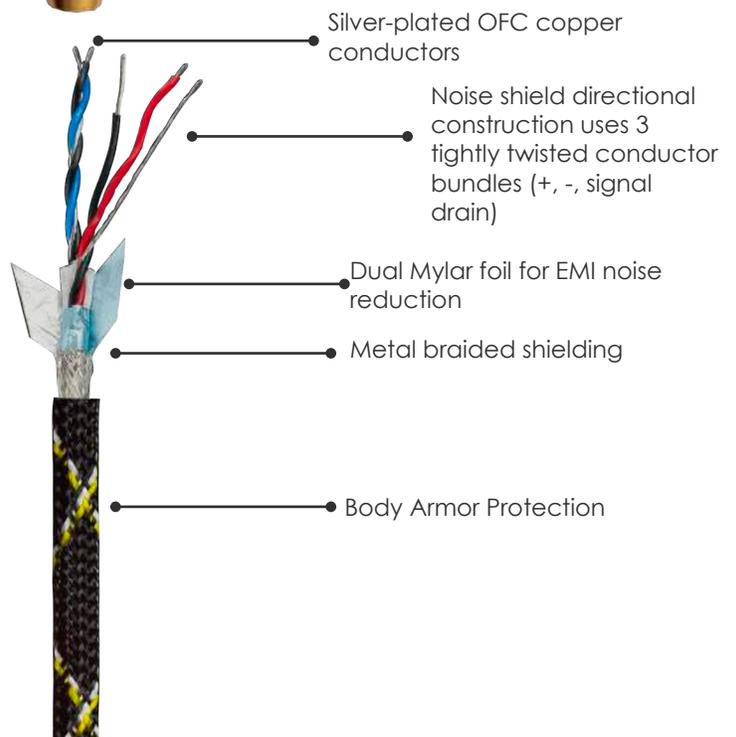

Silver-plated OFC copper conductors

Noise shield directional construction uses 3 tightly twisted conductor bundles (+, -, signal drain)

Dual Mylar foil for EMI noise reduction

Metal braided shielding

Body Armor Protection

X2 SERIES



C3 Tech

Continuous Connection Construction (C3 Tech) provides unmatched signal transfer



Dynamic Signal Flow

Dynamic Signal Flow uses finely stranded silver-plated, pure OFC copper to optimize signal vs. frequency interaction for a dynamic listening experience



Quad Clamp RCA Connector

Quad-Clamp's machined 4-clamp RCA connector allows for maximum clamping force and connection integrity



Noise Shield Directional Construction

Noise shield directional construction uses 3 tightly twisted conductor bundles (+, -, signal drain) per channel to create a directional noise cancelling architecture



I.D. Interference Defense

I.D. Interference Defense doubles the shielding efforts by combining two layers of EMI rejecting Mylar foil and radiated noise absorbing copper mesh, eliminating unwanted noise and interference



X2 Series Lineup

AUDIO INTERCONNECTS

XI2220: 2 Channels, Length: 20Ft/6.1m

XI2217: 2 Channels, Length: 17Ft/5.2m

XI2212: 2 Channels, Length: 12Ft/3.7m

XI226: 2 Channels, Length: 6Ft/1.8m

XI223: 2 Channels, Length: 3Ft/0.9m

XI221.5: 2 Channels, Length: 1.5Ft/0.5m

XI22YM: 2 Channels, Y- 2 Male, 1 Female

XI22YF: 2 Channels, Y- 1 Male, 2 Female


XI2420: 4 Channels, Length: 20Ft/6.1m

XI2417: 4 Channels, Length: 17Ft/5.2m

XI2412: 4 Channels, Length: 12Ft/3.7m

XI269: 6 Channels, Length: 9Ft/2.7m

XI2617: 6 Channels, Length: 17Ft/5.2m

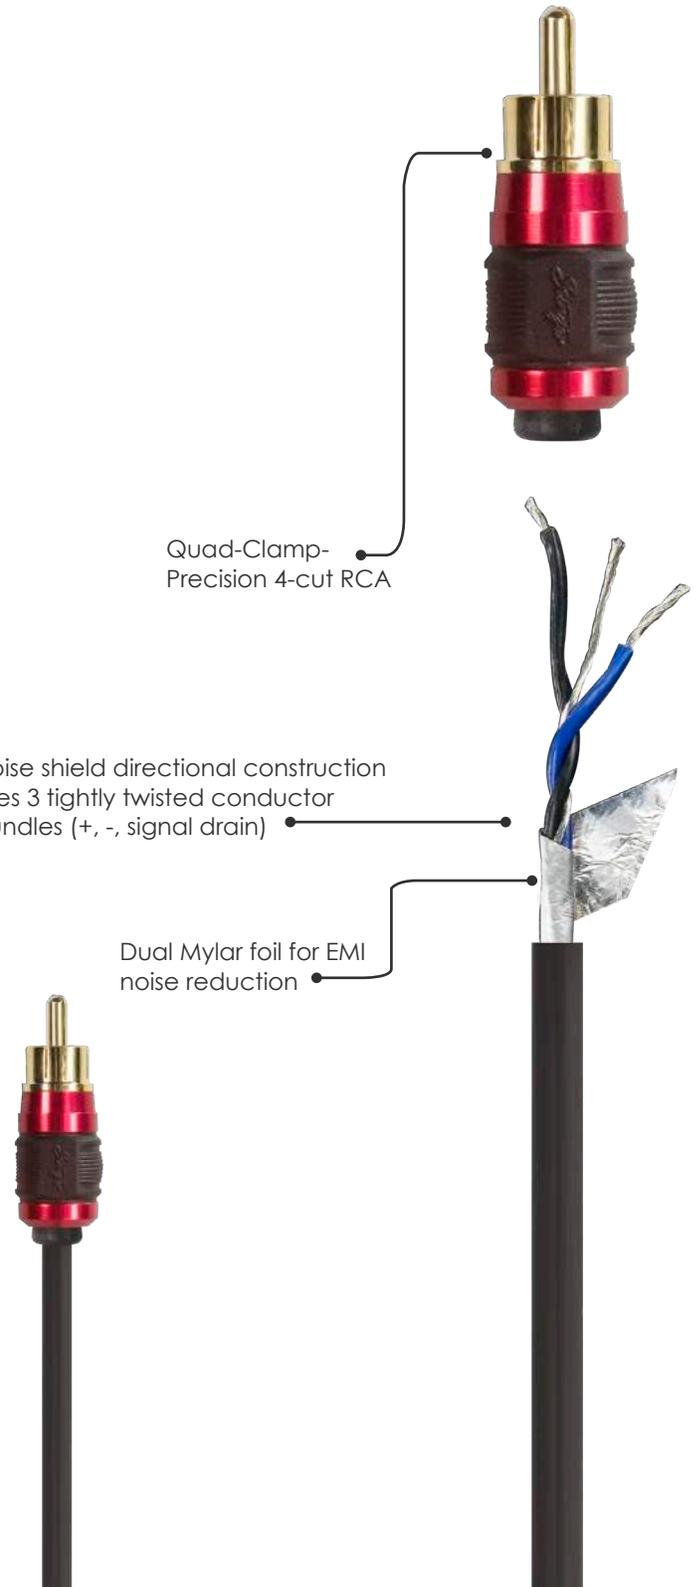

X1 SERIES



C3 Tech

Continuous Connection Construction (C3 Tech) provides unmatched signal transfer



Dynamic Signal Flow

Dynamic Signal Flow uses finely stranded silver-plated, pure OFC copper to optimize signal vs. frequency interaction for a dynamic listening experience



Noise Shield Directional Construction

Noise shield directional construction uses 3 tightly twisted conductor bundles (+, -, signal drain) per channel to create a directional noise cancelling architecture



X1 Series Lineup

AUDIO INTERCONNECTS

- XI1220:** 2 Channels, Length: 20Ft/6.1m
- XI1217:** 2 Channels, Length: 17Ft/5.2m
- XI1212:** 2 Channels, Length: 12Ft/3.7m
- XI126:** 2 Channels, Length: 6Ft/1.8m
- XI123:** 2 Channels, Length: 3Ft/0.9m
- XI121.5:** 2 Channels, Length: 1.5Ft/0.5m
- XI12YM:** 2 Channels, Y- 2 Male, 1 Female
- XI12YF:** 2 Channels, Y- 2 Female 1 Male
- XI1420:** 4 Channels, Length: 20Ft/6.1m
- XI1417:** 4 Channels, Length: 17Ft/5.2m
- XI1617:** 6 Channels, Length: 17Ft/5.2m



3.5mm

- XI136:** 2 Channels, Length: 6Ft/1.8m, 3.5mm, 3.5mm



VIDEO INTERCONNECTS

- XI1820:** Video Interconnect Shielded 75 Ohm, Length: 20Ft/6.1m
- XI1812:** Video Interconnect Shielded 75 Ohm, Length: 12Ft/3.7m



TOSLINK INTERCONNECTS

- XI1117:** Fiber Optic Cable with TosLink Connectors, Length: 17Ft/5.2m
- XI116:** Fiber Optic Cable with TosLink Connectors, Length: 6Ft/1.8m
- XI113:** Fiber Optic Cable with TosLink Connectors, 3Ft/0.9m



Stinger

HIGH PERFORMANCE

The core line of Stinger offers audiophiles the accessories they demand to build the high performance systems they live for. A focus on quality, Stinger is designed and engineered to achieve the highest performance from audio components, for precision sound reproduction no matter where the road takes you.

Our merchandising and dealer programs are developed to not only give your stores the products you desire, but also the profit you need to be successful.

THE STINGER LINEUP

- ▶ Wiring Kits
- ▶ Wire
- ▶ Interconnects
- ▶ RoadKill Sound Damping
- ▶ Batteries
- ▶ Installation Accessories

WIRING KITS 6000 SERIES

6000 SERIES WIRING KITS FEATURING UPGRADED FUSE HOLDER AND FEATURING A PROTECTIVE WIRE MESH COVERING ON INCLUDED POWER WIRE

Available in Power and Complete (power + signal) Kits, Stinger's 6000 Series Wiring kits have all the essentials for a professional installation. Featuring 100% oxygen-free tinned copper for a pure, uninterrupted transfer of power. Tru-spec cables/wires meet or exceed the industry standard of copper required for the gauge size.

SK6201 1/0GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 4000 WATTS OR 300 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Blue Hyper-Twist 1/0GA Power Wire
- ▶ 3ft./0.9m Matte Clear Hyper-Twist 1/0GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ SHD201 Water-Resistant ANL Fuse Holder
- ▶ 300 Amp Shoc-Krome ANL Fuse
- ▶ 1/0GA Crimp Ring Terminals Pre-Installed
- ▶ Stinger Metal Installation Badge
- ▶ 16GA Blue Butt Connector
- ▶ 1/0GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

SK6241 4GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 1750 WATTS OR 175 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Blue Hyper-Twist 4GA Power Wire
- ▶ 3ft./0.9m Matte Clear Hyper-Twist 4GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ SHD801 Water-Resistant Mini-ANL (MIDI) Fuse Holder
- ▶ 175 Amp Shoc-Krome Mini-ANL (MIDI) Fuse
- ▶ 4GA Crimp Ring Terminals Pre-Installed
- ▶ Stinger Metal Installation Badge
- ▶ 16GA Blue Butt Connector
- ▶ 4GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

WIRING KITS 6000 SERIES

SK6281 8GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 800 WATTS OR 70 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Blue Hyper-Twist 8GA Power Wire
- ▶ 3ft./0.9m Matte Clear Hyper-Twist 8GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ SHD801 Water-Resistant Mini-ANL (MIDI) Fuse Holder
- ▶ 70 Amp Shoc-Krome Mini-ANL (MIDI) Fuse
- ▶ 8GA Crimp Ring Terminals Pre-Installed
- ▶ Stinger Metal Installation Badge
- ▶ 16GA Blue Butt Connector

COMPLETE KITS: POWER + SIGNAL

SK6641 4GA Complete Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 1750 WATTS OR 175 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Blue Hyper-Twist 4GA Power Wire
- ▶ 3ft./0.9m Matte Clear Hyper-Twist 4GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ (1) 17ft./5.2m 6000 Series 2-Channel Audio Interconnect (SI6217)
- ▶ 30ft./9.1m Matte Blue Hyper-Twist 16 Gauge Speaker Wire
- ▶ SHD801 Water-Resistant Mini-ANL (MIDI) Fuse Holder
- ▶ 175 Amp Shoc-Krome Mini-ANL (MIDI) Fuse
- ▶ 4GA Crimp Ring Terminals Pre-Installed
- ▶ Stinger Metal Installation Badge
- ▶ 16GA Blue Butt Connector
- ▶ 4GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

SK6681 8GA Complete Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 800 WATTS OR 70 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Blue Hyper-Twist 8GA Power Wire
- ▶ 3ft./0.9m Matte Clear Hyper-Twist 8GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ (1) 17ft./5.2m 6000 Series 2-Channel Audio Interconnect (S16217)
- ▶ SHD801 Water-Resistant Mini-ANL (MIDI) Fuse Holder
- ▶ 70 Amp Shoc-Krome Mini-ANL (MIDI) Fuse
- ▶ 8GA Crimp Ring Terminals Pre-Installed
- ▶ Stinger Metal Installation Badge
- ▶ 16GA Blue Butt Connector
- ▶ 8GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

WIRING KITS 4000 SERIES

4000 SERIES WIRING KITS

Available in Power and Complete (power + signal) Kits, Stinger's 4000 Series Wiring kits have all the essentials for a professional installation. Featuring 100% oxygen-free finned copper for a pure uninterrupted transfer of power. Tru-spec cables/wires meet or exceed the industry standard of copper required for the gauge size.

SK4201 1/0GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 3400 WATTS OR 250 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Red Hyper-Twist 1/0GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 1/0GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ SPD5201 ANL Fuse Holder
- ▶ 250 Amp Shoc-Krome ANL Fuse
- ▶ 1/0GA Crimp Ring Terminals Pre-Installed
- ▶ 16GA Blue Butt Connector
- ▶ 1/0GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

SK4241 4GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 1500 WATTS OR 150 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Red Hyper-Twist 4GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 4GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ SPD5801 mini-ANL (MIDI) Fuse Holder
- ▶ 150 Amp Shoc-Krome MIDI Fuse
- ▶ 4GA Crimp Ring Terminals Pre-Installed
- ▶ 16GA Blue Butt Connector
- ▶ 4GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

SK4281 8GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 600 WATTS OR 60 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Red Hyper-Twist 8GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 8GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ SPD5101 AGU Fuse Holder
- ▶ 60 Amp AGU Fuse
- ▶ 8GA Crimp Ring Terminals Pre-Installed
- ▶ 16GA Blue Butt Connector
- ▶ 8GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

COMPLETE KITS: POWER + SIGNAL

SK4641 4GA Complete Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 1500 WATTS OR 150 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Red Hyper-Twist 4GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 4GA Ground Wire
- ▶ (1) 17ft./5.2m 4000 Series 2-Channel Audio Interconnect (SI4217)
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ SPD5801 mini-ANL (MIDI) Fuse Holder
- ▶ 150 Amp Shoc-Krome MIDI Fuse
- ▶ 4GA Crimp Ring Terminals Pre-Installed
- ▶ 16GA Blue Butt Connector
- ▶ 4GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

SK4681 8GA Complete Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 600 WATTS OR 60 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Red Hyper-Twist 8GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 8GA Ground Wire
- ▶ (1) 17ft./5.2m 4000 Series 2-Channel Audio Interconnect (SI4217)
- ▶ 17ft./5.2m Matte Blue 18Ga Remote Turn-On Wire
- ▶ SPD5101 AGU Fuse Holder
- ▶ 60 Amp AGU Fuse
- ▶ 8GA Crimp Ring Terminals Pre-Installed
- ▶ 16GA Blue Butt Connector
- ▶ 8GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

SK46101 10GA Complete Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 300 WATTS OR 30 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Red Hyper-Twist 10GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 10GA Ground Wire
- ▶ (1) 17ft./5.2m 4000 Series 2-Channel Audio Interconnect (SI4217)
- ▶ 17ft./5.2m Matte Blue 18Ga Remote Turn-On Wire
- ▶ Water-Resistant ATC Fuse Holder
- ▶ 30 Amp ATC Fuse
- ▶ 10GA Crimp Ring Terminals Pre-Installed
- ▶ 16GA Blue Butt Connector
- ▶ 10GA Snap In Protective Firewall Grommet
- ▶ Self-Drilling Mounting Screws
- ▶ (10) 7"/17.8cm Wire Ties

WIRING KITS QUICK REFERENCE GUIDE

Stinger's modular planogram programs make it easy to select the products you need, and outfit your store. We offer smaller building block packages, and then full walls. All planogram options are detailed in the merchandising section of this catalog.

PLANOGRAM 6000 SERIES

S1768184

20"X 30"

Includes:

1: SK6201

2 Each: SK6641, SK6681, SK6281

PLANOGRAM 4000 SERIES

S1795984

20"X 30"

Includes:

Includes:

1: SK4201

2 Each: SK4201, SK4641, SK4681, SK4281



| | PART NUMBER | PRODUCT |
|------------------------|-------------|---------------------------|
| 6000 SERIES | SK6201 | 1/0 GA Power Wiring Kit |
| | SK6641 | 4 GA Complete Wiring Kit |
| | SK6241 | 4 GA Power Wiring Kit |
| | SK6681 | 8 GA Complete Wiring Kit |
| | SK6281 | 8 GA Power Wiring Kit |
| 4000 SERIES | SK4201 | 1/0 GA Power Wiring Kit |
| | SK4641 | 4 GA Complete Wiring Kit |
| | SK4241 | 4 GA Power Wiring Kit |
| | SK4681 | 8 GA Complete Wiring Kit |
| | SK4281 | 8 GA Power Wiring Kit |
| | SK46101 | 10 GA Complete Wiring Kit |

WIRING KITS SPECIALTY

MARINE COMPLETE AMPLIFIER INSTALLATION KIT

- ▶ Power Wiring Kit utilizing Marine grade jacket. True Copper for current transfer and tinned conductors for reliability in the harsh marine environment
- ▶ Industry first Siamese Pair dual power and ground wire
- ▶ High Strand Count OFC Hyper-Twist Tinned Conductors
- ▶ Highest Marine Grade - Type III BC5W2 Compliant Marine PVC Jacket, 1050C Dry, 750C wet, Salt, Fog, Oil, Water resistant Exceeds UL1426 Marine Standards
- ▶ Element resistant MIDI fuse holder

- SEA4247** - 4GA 7 meter / 23 feet / 80 amp MIDI fuse
- SEA4243** - 4GA 3 meter / 9.8 feet / 175 amp MIDI fuse
- SEA4287** - 8GA 7 meter / 23 feet / 40 amp MIDI fuse
- SEA4283** - 8GA 3 meter / 9.8 feet / 80 amp MIDI fuse



SEA4287



SEA4247

SPXRZR4242

UNIVERSAL 2/4 CHANNEL AMP INSTALLATION KIT FOR OFF-ROAD VEHICLES

Plug-and-Play for 2014+ Polaris RZR

- ▶ Kit Includes under dash amplifier mounting bracket
- ▶ Pre-cut and loomed power/ ground & speaker wire harnesses
- ▶ Fusing and pre-terminated wiring
- ▶ Compatible with 2-seat and 4-seat models
- ▶ 4GA into dual 8GA power / ground wire
- ▶ 16GA speaker wire
- ▶ 150 amp MIDI fuse



SVT4681

HARLEY-DAVIDSON 2/4 CHANNEL UNIVERSAL AMPLIFIER WIRING KIT

Plug-and-Play for 1998+ Harley-Davidson Touring Motorcycles

- ▶ Pre-cut and loomed power/ ground & speaker wire harnesses
- ▶ Direct fit wiring and fusing with pre-terminated ends with Ferrule connectors
- ▶ Includes OEM connections for interfacing with 1998 and up models
- ▶ Works on Street/Electra Glide and Road Glide models
- ▶ 8GA OFC power and ground
- ▶ 16GA speaker wire
- ▶ 60 amp MAXI fuse



MADE FOR HARLEY-DAVIDSON



TOTAL PROFIT SYSTEM (TPS)

Stinger's Total Profit System (TPS) helps dealers increase profit, lower costs, and provide customers with a high quality installation solution.

What is TPS?

Stinger's TPS gives you the ability to sell and merchandise kits to your customers while taking advantage of bulk speaker wire, power cable purchasing, delivering increased profit for you and eliminating waste. Additionally, you gain valuable real estate on your showroom floor. The three TPS kits take up less room on your product wall, allowing room for additional product showcasing. The TPS Install Kits come with everything needed for installs, minus the speaker wire, power cable, and interconnects. The hardware, remote lead, and accessories are together in streamlined a package, along with a remote turn-on wire. Rolled speaker wire is used instead of pre-cut lengths.

The Stinger power cable and interconnects are sold separately.

How TPS Works

Customers pay the same amount for the TPS Install Kits as they would for the wiring kit. Installers cut only the wire they need. Dealers have more display room and need fewer SKUs and less inventory.

Why? Wasted wire is money thrown away.

Dealers can increase profit by up to 42% just by reducing this waste.

Increase Your Profit

When you purchase a TPS system, you not only get the product, you get the series-specific, personalized signage with your custom pricing. This provides your customer and sales staff easy reference to the cost, including amplifier installation accessories and labor.

Impact Your Customers

Display your custom pricing signage near the amplifiers or soundboard. This helps customers understand the connection between the two and guides them to the TPS display. Choosing the Stinger TPS Install Kit becomes the natural choice.

TPS PLANOGRAM



Stinger

TOTAL PROFIT SYSTEM KITS



SK101

1/0GA INSTALL KIT UP TO 4000 WATTS OR 300 AMPS:

- SHD201 water-resistant ANL fuse holder
- 300 amp Shoc-Krome ANL fuse
- 17ft. matte blue 18GA remote turn-on wire
- 1/0GA crimp ring terminals
- Blue, red, black boots to match power wire
- 18GA fork terminal
- 16GA blue butt connector
- 1/0GA snap in protective firewall grommet
- Self-drilling mounting screws
- (10) 7" wire ties



SK141

4GA INSTALL KIT UP TO 1000 WATTS OR 100 AMPS:

- SPD5801 waterproof mini-ANL (MIDI) fuse holder
- 100 amp Shoc-Krome mini-ANL (MIDI) fuse
- 17ft. matte blue 18GA remote turn-on wire
- 4GA crimp ring terminals
- Blue, red, black boots to match power wire
- 18GA fork terminal
- 16GA blue butt connector
- 4GA snap in protective firewall grommet
- Self-drilling mounting screws
- (10) 7" wire ties



SK181

8GA INSTALL KIT UP TO 800 WATTS OR 70 AMPS:

- SPD5801 waterproof mini-ANL (MIDI) fuse holder
- 70 amp Shoc-Krome mini-ANL (MIDI) fuse
- 17ft. matte blue 18GA remote turn-on wire
- 8GA crimp ring terminals
- Blue, red, black boots to match power wire
- 18GA fork terminal
- 16GA blue butt connector
- 8GA snap in protective firewall grommet
- Self-drilling mounting screws
- (10) 7" wire ties

Personalize Your Own Signage

(12" W x 18" H Signage Included with Purchase)

Visit:

<http://services.aampglobal.com/web/dealers/TPS/AIPOrder.html>

Fill out your pricing information, and your personalized signage will arrive in approximately 15 days.



WIRE: MERCHANDISING



Stinger's modular planogram programs simplify the ordering process. See the Merchandising section for detailed merchandising kits and planogram solutions.



SGM2N

Standing Wire Rack with Locking Wheels
52" H x 24" W x 21" D



SGM1N

Slatwall Wire Rack
7" H x 22.5" W x 14" D




Stinger's power and speaker wire is made of True-Spec, tinned, oxygen-free copper for oxidation prevention, making Stinger one of the best conductors available. Our wire boasts Hyper-Twist construction, creating a dense yet incredibly flexible wire that is easy to install and provides outstanding performance

Why Stinger Only Uses OFC Copper

| 100% Copper | | | | | | | | | | | | | | | |
|--|-----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|------|
| COPPER WIRE AMPERAGE in Feet | | | | | | | | | | | | | | | |
| | | 10 | 20 | 30 | 40 | 50 | 60 | 75 | 100 | 150 | 200 | 350 | 500 | 750 | 1000 |
| GAUGE | 000 | | | | | | | 95 | 72 | 48 | 36 | 22 | 15 | 10 | 8 |
| | 1/0 | | | | | | | 61 | 45 | 30 | 23 | 15 | 9 | | |
| | 3 | | | | 57 | 45 | 38 | 29 | 20 | 15 | 12 | 7 | | | |
| | 4 | | | 60 | 45 | 36 | 30 | 24 | 18 | 12 | 9 | | | | |
| | 8 | | 36 | 24 | 18 | 14 | 12 | 9 | | | | | | | |
| | 10 | 22 | 15 | 11 | 9 | | | | | | | | | | |
| Conservative Loss Adjustment for CCA 45% | | | | | | | | | | | | | | | |
| CCA WIRE AMPERAGE in Feet | | | | | | | | | | | | | | | |
| | | 10 | 20 | 30 | 40 | 50 | 60 | 75 | 100 | 150 | 200 | 350 | 500 | 750 | 1000 |
| GAUGE | 000 | | | | | | | 52 | 40 | 26 | 20 | 12 | 8 | 6 | 4 |
| | 1/0 | | | | | | | 34 | 25 | 17 | 13 | 8 | 5 | | |
| | 3 | | | | 31 | 25 | 21 | 16 | 11 | 8 | 7 | 4 | | | |
| | 4 | | | 33 | 25 | 20 | 17 | 13 | 10 | 7 | 5 | | | | |
| | 8 | | 20 | 13 | 10 | 8 | 7 | 5 | | | | | | | |
| | 10 | 12 | 8 | 6 | 5 | | | | | | | | | | |

WIRE: POWER WIRE

POWER WIRE



1/0GA

SHW10B (50Ft/15.2m Roll): Blue
 SHW10G (50Ft/15.2m Roll): Gray
 SHW10C (50Ft/15.2m Roll): Clear
 SPW10TR (50Ft/15.2m Roll): Matte Red
 SPW10TB (50Ft/15.2m Roll): Matte Black

4GA

SHW14B20 (20Ft/6.1m Blister): Blue
 SHW14C7 (7Ft/2.1m Blister): Clear
 SHW14B (100Ft/30.5m Roll): Blue
 SHW14G (100Ft/30.5m Roll): Gray
 SHW14C (100Ft/30.5m Roll): Clear
 SPW14TR (100Ft/30.5m Roll): Matte Red
 SPW14TB (100Ft/30.5m Roll): Matte Black
 SPW14TR250 (250Ft/76.2m Roll): Matte Red
 SPW14TB250 (250Ft/76.2m Roll): Matte Black

8GA

SHW18B20 (20Ft/6.1m Blister): Blue
 SHW18C7 (7Ft/2.1m Blister): Clear
 SHW18B (250Ft/76.2m Roll): Blue
 SHW18G (250Ft/76.2m Roll): Gray
 SHW18C (250Ft/76.2m Roll): Clear
 SPW18TR (250Ft/76.2m Roll): Matte Red
 SPW18TB (250Ft/76.2m Roll): Matte Black
 SPW18TR500 (500Ft/152.4m Roll): Matte Red
 SPW18TB500 (500Ft/152.4m Roll): Matte Black

10GA

SPW110TR (250Ft/76.2m Roll): Matte Red
 SPW110TR500 (500Ft/152.4m Roll): Matte Red
 SPW110TB (250Ft/76.2m Roll): Matte Black
 SPW110TB500 (500Ft/152.4m Roll): Matte Black

1/0GA POWER WIRE



SHW10B

1/0GA Blue
 (50Ft/15.2m Roll)
 4214 strands



SHW10G

1/0GA Gray
 (50Ft/15.2m Roll)
 4214 strands



SHW10C

1/0GA Clear
 (50Ft/15.2m Roll)
 4214 strands



SPW10TR

1/0GA Matte Red
 (50Ft/15.2m Roll)
 4214 strands

4GA POWER WIRE



SPW10TB

1/0GA Matte Black
 (50Ft/15.2m Roll)
 4214 strands



SHW14B20

4GA Blue
 (20Ft/6.1m Blister)
 1666 strands



SHW14C7

4GA Clear
 (7Ft/2.1m Blister)
 1666 strands



SHW14B

4GA Blue
 (100Ft/30.5m Roll)
 1666 strands



SHW14G

4GA Gray
 (100Ft/30.5m Roll)
 1666 strands



SHW14C

4GA Clear
 (100Ft/30.5m Roll)
 1666 strands



SPW14TR

4GA Matte Red
 (100Ft/30.5m Roll)
 1666 strands



SPW14TR250

4GA Matte Red
 (250Ft/76.2m Roll)
 1666 strands

WIRE: POWER WIRE

8GA POWER WIRE



SPW14TB

4GA Matte Black
(100Ft/30.5m Roll)
1666 strands



SPW14TB250

4GA Matte Black
(250Ft/76.2m Roll)
1666 strands



SHW18B20

8GA Blue
(20Ft/6.1m Blister)
665 strands



SHW18C7

8GA Clear
(7Ft/2.1m Blister)
665 strands



SHW18B

8GA Blue
(250Ft/76.2m Roll)
665 strands



SHW18G

8GA Gray
(250Ft/76.2m Roll)
665 strands



SHW18C

8GA Clear
(250Ft/76.2m Roll)
665 strands



SPW18TR

8GA Matte Red
(250Ft/76.2m Roll)
665 strands

10GA POWER WIRE



SPW18TR500

8GA Matte Red
(500Ft/152.4m Roll)
665 strands



SPW18TB

8GA Matte Black
(250Ft/76.2m Roll)
665 strands



SPW18TB500

8GA Matte Black
(500Ft/152.4m Roll)
665 strands



SPW110TR

10GA Matte Red
(250Ft/76.2m Roll)
413 strands



SPW110TR500

10GA Matte Red
(500Ft/152.4m Roll)
413 strands



SPW110TB

10GA Matte Black
(250Ft/76.2m Roll)
413 strands



SPW110TB500

10GA Matte Black
(500Ft/152.4m Roll)
413 strands

WIRE: SPEAKER WIRE

SPEAKER WIRE



10 GA
SHW510G (50 Ft Roll): Gray

12 GA
SPW512BK (250Ft/76.2m Roll): Black
SPW512B (100Ft/30.5m Roll): Blue
SPW512B250 (250Ft/76.2m Roll): Blue
SHW512G (100Ft/30.5m Roll): Gray
SHW512G250 (250Ft/76.2m Roll): Gray

14GA
SHW514B15 (15Ft/4.6m Blister): Blue
SPW514BK (500Ft/152.4m Roll): Black

16 GA
SHW516B50 (50Ft/15.2m Blister): Blue
SHW516B (250Ft/76.2m Roll): Blue

16 GA Cont'd
SHW516B500 (500Ft/152.4m Roll): Blue
SHW516G (250Ft/76.2m Roll): Gray
SHW516G500 (500Ft/152.4m Roll): Gray
SPW516GY (500Ft/152.4m Roll): Gray
SPW516BK (500Ft/152.4m Roll): Black
SPW516WH (500Ft/152.4m Roll): White
SPW516RB (1000Ft/304.8m Roll): Red / Black
SPW516C500 (500Ft/152.4m Roll): Clear
SPW516C (1000Ft/304.8m Roll): Clear

18 GA
SPW518BK1 (1000Ft/304.8m Roll): Black
SPW518C (1000Ft/304.8m Roll): Clear

20 GA
SPW520RB (500Ft/152.4m Roll): Red/Black

10GA SPEAKER WIRE



SHW510G
 10GA Gray
 (50Ft/15.2m Roll)
 462 strands

12GA SPEAKER WIRE



SPW512BK
 12GA Black
 (250Ft/76.2m Roll)
 238 strands



SHW512B
 12GA Blue
 (100Ft/30.5m Roll)
 238 strands



SHW512B250
 12GA Blue
 (250Ft/76.2m Roll)
 238 strands



SHW512G
 12GA Gray
 (100Ft/30.5m Roll)
 238 strands



SHW512G250
 12GA Gray
 (250Ft/76.2m Roll)
 238 strands

14GA SPEAKER WIRE



SHW514B15
 14GA Blue
 (15Ft/4.6m Blister)
 182 strands



SPW514BK
 14GA Black
 (500Ft/152.4m Roll)
 182 strands

16GA SPEAKER WIRE



SHW516B50
 16GA Blue
 (50Ft/15.2m Blister)
 65 strands



SHW516B
 16GA Blue
 (250Ft/76.2m Roll)
 65 strands



SHW516B500
 16GA Blue
 (500Ft/152.4m Roll)
 65 strands



SHW516G
 16GA Gray
 (250Ft/76.2m Roll)
 65 strands

WIRE: SPEAKER WIRE



SHW516G500

16GA Gray
(500Ft/152.4m Roll)
65 strands



SPW516GY

16GA Gray
(500Ft/152.4m Roll)
65 strands



SPW516BK

16GA Black
(500Ft/152.4m Roll)
65 strands



SPW516WH

16GA White
(500Ft/152.4m Roll)
65 strands

18GA SPEAKER WIRE



SPW516RB

16GA Red Black
(1000Ft/304.8m Roll)
26 strands



SPW516C500

16GA Clear
(500Ft/152.4m Roll)
26 strands



SPW516C

16GA Clear
(1000Ft/304.8m Roll)
26 strands



SPW518BK1

18GA Black
(1000Ft/304.8m Roll)
41 strands

20GA SPEAKER WIRE/LED



SPW518C

18GA Clear
(1000Ft/304.8m Roll)
16 strands



SPW520RB

20GA Red Black
(500Ft/152.4m Roll)

9 Conductor Speedwire

18GA
EIA Standard Color Codes
SGW9920 : 20Ft/6.1m Blister
SGW991: 100Ft/30.5m Roll
SGW992: 250Ft/76.2m Roll



5 Conductor Speedwire


18GA
EIA Standard Color Codes
SGW951 : 100Ft/30.5m Roll



WIRE: PRIMARY WIRE

Our primary installation wire is constructed of OFC copper for high current transfer. With a wide variety of colors and applications, Stinger has your installation needs covered.

- High-Temp/Flexible/PCV Jacket
- Ranging from 12GA to 18GA
- Interior or Under Hood Applications

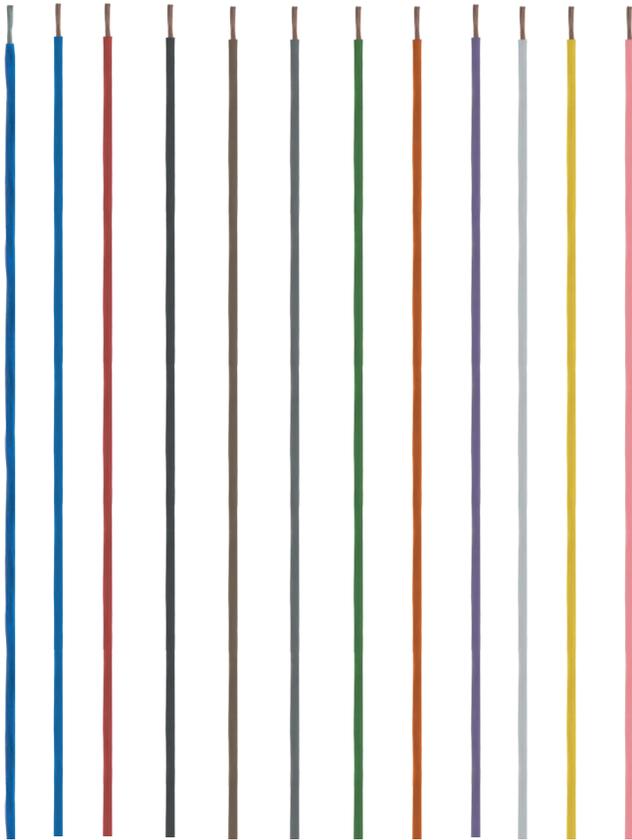

SGM2N
Standing Wire Rack with Locking Wheels
52" H x 24" W x 21" D



WIRE: PRIMARY WIRE

12GA PRIMARY WIRE



SPW312RD
12GA Red
(500Ft/152.4m Roll)



SPW312BK
12GA Black
(500Ft/152.4m Roll)

14GA PRIMARY WIRE



SPW314RD
14GA Red
(500Ft/152.4m Roll)



SPW314BK
14GA Black
(500Ft/152.4m Roll)

16GA PRIMARY WIRE



SPW316RD
16GA Red
(500Ft/152.4m Roll)



SPW316BK
16GA Black
(500Ft/152.4m Roll)



SPW316BL
16GA Blue
(500Ft/152.4m Roll)



SPW316YL
16GA Yellow
(500Ft/152.4m Roll)



SPW516RB
16GA Red Black
(500Ft/152.4m Roll)



SGM2N
Standing Wire Rack
w/ Locking Wheels
52" H x 24" W x 21" D

WIRE: PRIMARY WIRE

18GA + 20GA PRIMARY WIRE



SPW318BL
18GA Blue
(500Ft/152.4m Roll)



SPW318BL1
18GA Blue
(1000Ft/304.8m Roll)



SPW318BK
18GA Black
(500Ft/152.4m Roll)



SPW318BK1
18GA Black
(1000Ft/304.8m Roll)



SPW318BR
18GA Brown
(500Ft/152.4m Roll)



SPW318GR
18GA Green
(500Ft/152.4m Roll)



SPW318GY
18GA Gray
(500Ft/152.4m Roll)



SPW318OR
18GA Orange
(500Ft/152.4m Roll)



SPW318PK
18GA Pink
(500Ft/152.4m Roll)



SPW318PU
18GA Purple
(500Ft/152.4m Roll)



SPW318RD
18GA Red
(500Ft/152.4m Roll)



SPW318WH
18GA White
(500Ft/152.4m Roll)



SPW318YL
18GA Yellow
(500Ft/152.4m Roll)



SPW318TU
18GA Trans. Blue
(500Ft/152.4m Roll)




SPW520RB
20GA Red Black
(500Ft/152.4m Roll)

NOTES:

Interconnects

Stinger offers peak performance interconnects that are flexible and look great even in highly complicated installations.


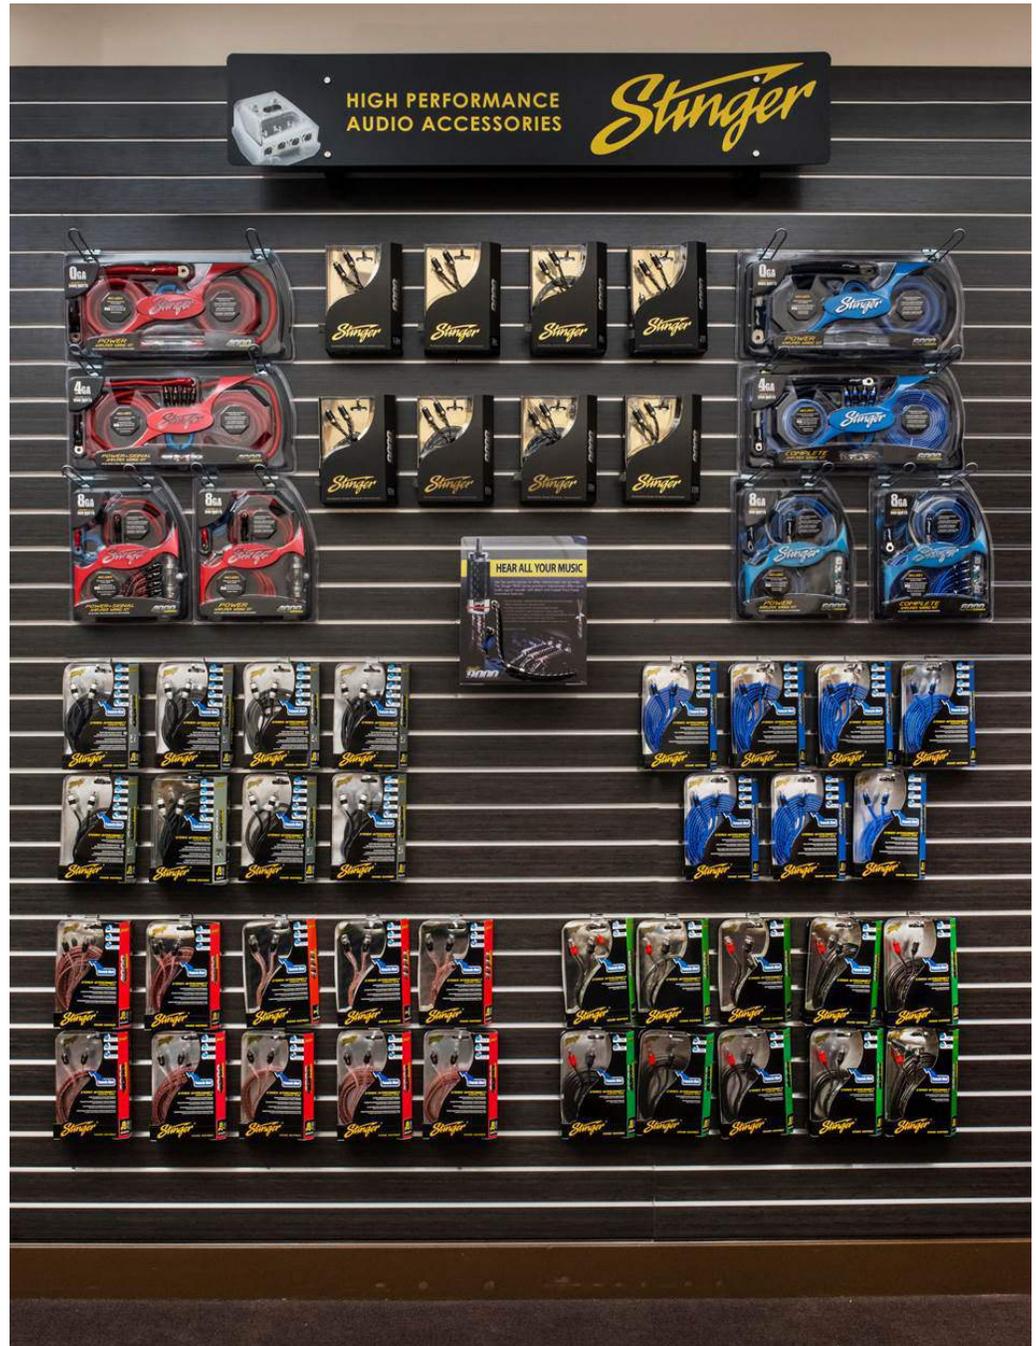


Stinger's modular planogram programs simplify the ordering process. See the Merchandising section for detailed merchandising kits and planogram solutions.

INTERCONNECTS: 9000 SERIES

9000 SERIES OF INTERCONNECTS

Made to deliver the best bass response, openness, tonality, and accuracy possible while drastically reducing electrical resistance and interference.

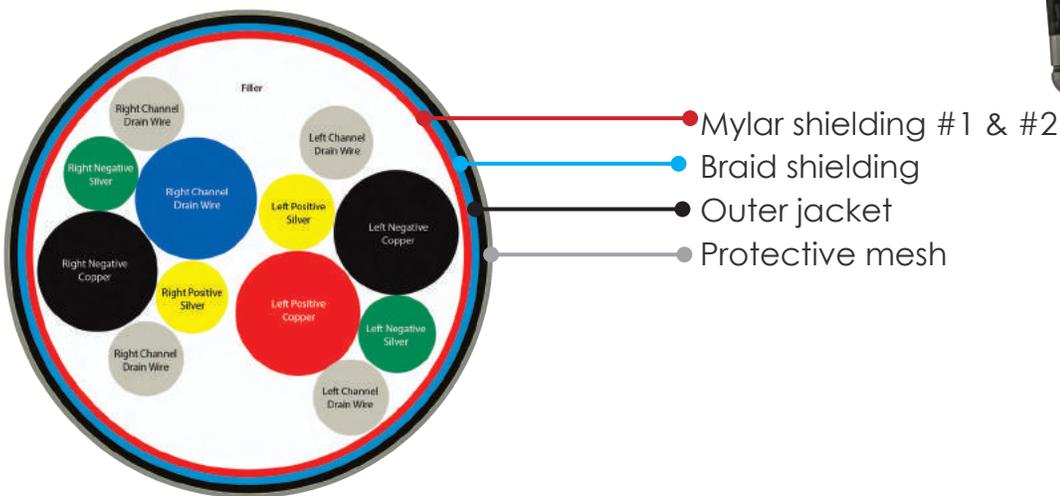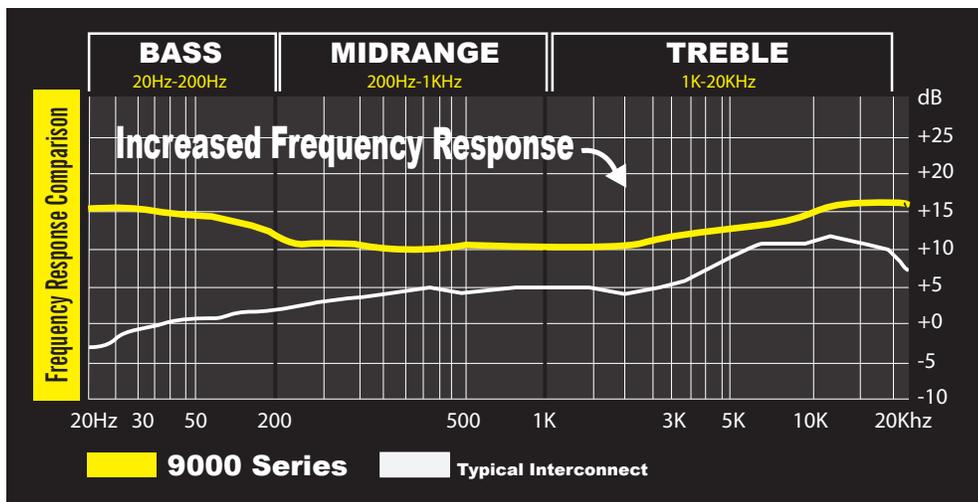

2-CHANNEL INTERCONNECTS

SI9220: Length: 20Ft/6.1m

SI9217: Length: 17Ft/5.2m

SI9212: Length: 12Ft/3.7m

SI926: Length: 6Ft/1.8m


SI923: Length: 3Ft/0.9m

SI91.5: Length: 1.5Ft/0.5m


Y - CONNECTORS

SI92YF: 2 female - 1 male

SI92YM: 2 male - 1 female

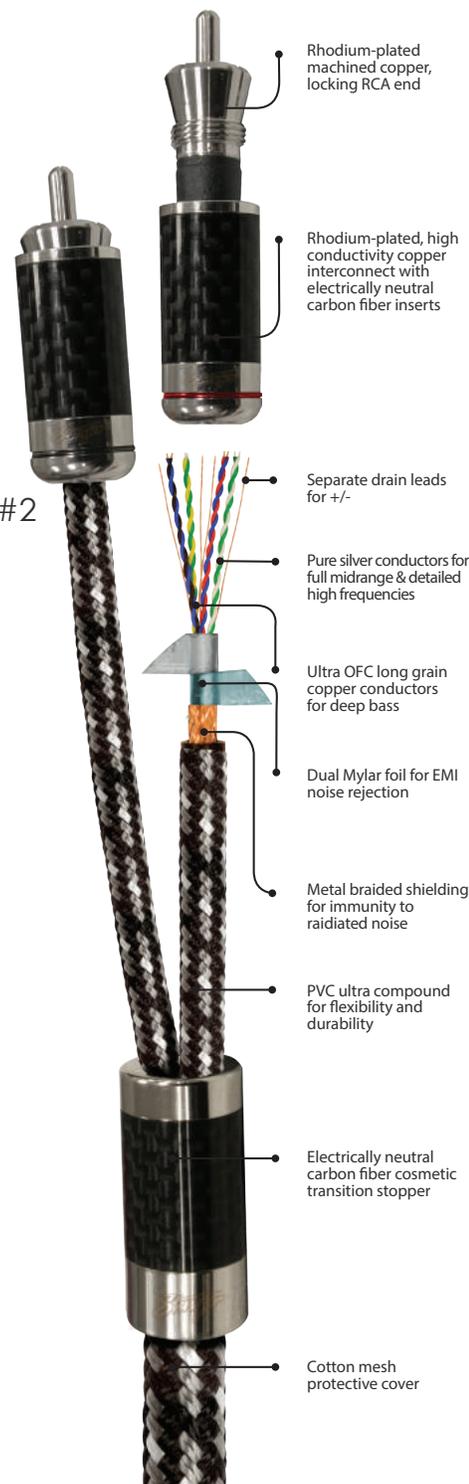

INTERCONNECTS: 8000 SERIES

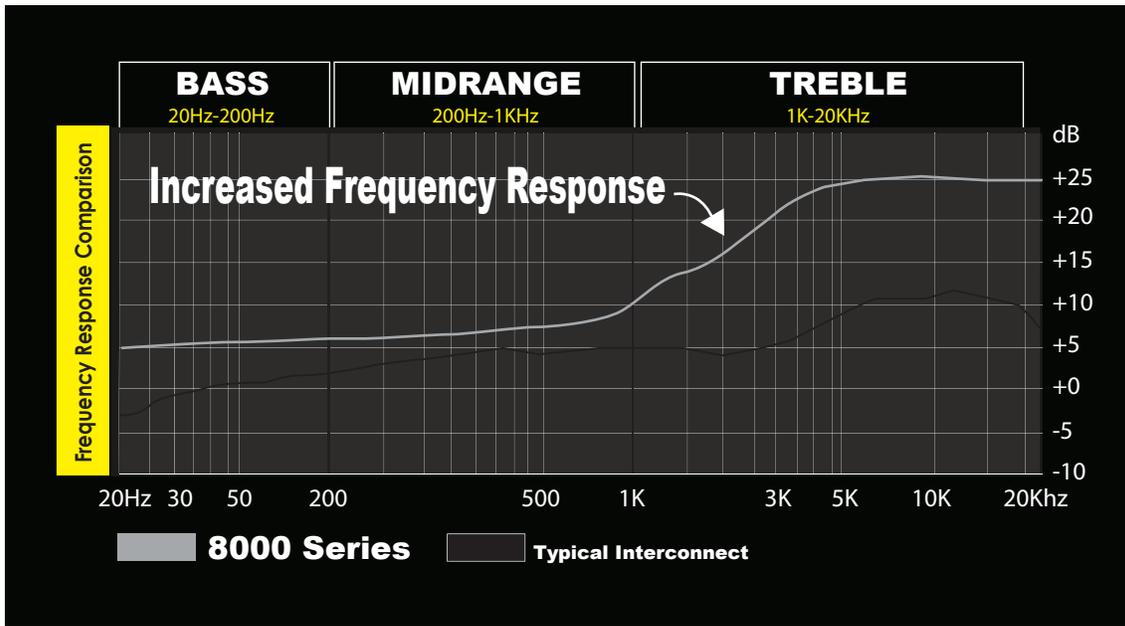

FEATURES

- ▶ Stinger Audiophile Grade Design Improves Sound Quality, Noise Rejection, and Offers Easy Installation
- ▶ Oversized Silver-Plated Copper Conductors Provide Tight Bass Response, and Crystal Clear Highs
- ▶ Combination of Copper and Silver Allows for Extended Frequency Response
- ▶ Mono Cable Design with Undersized Stopper
- ▶ Molded Strain Reliefs for Excellent Durability
- ▶ Locking Split-Tip Connectors Allow Better Signal Transfer
- ▶ No Solder Joints for True Channel Separation and Connection Reliability
- ▶ Precision Machined "Locking" Metal Ends with Channel Identification
- ▶ Twisted Pair Winding Patterns Improve Clarity and Ensure Consistent Timing
- ▶ Pewter Finished Ends for High-End Installs
- ▶ Black Mesh Protective Jacket Looks Great and Minimizes Friction for Easy Install
- ▶ Directional High Rate Double Twisted-Pair Construction Provides Protection against Interference
- ▶ Triple Braided Shielding Construction for Increased Noise Rejection
- ▶ Mylar Shielding for Increased Noise Rejection
- ▶ 3 Conductors per Channel for a Total of 6 Conductors (2 Channels)
- ▶ Continuous Connection Construction (C3 Tech) Provides Unmatched Signal Transfer



2-CHANNEL INTERCONNECTS

- SI8220:** Length: 20Ft/6.1m
- SI8217:** Length: 17Ft/5.2m
- SI8212:** Length: 12Ft/3.7m
- SI826:** Length: 6Ft/1.8m
- SI823:** Length: 3Ft/0.9m


4-CHANNEL INTERCONNECTS

- SI8420:** Length: 20Ft/6.1m
- SI8417:** Length: 17Ft/5.2m
- SI8412:** Length: 12Ft/3.7m

Y CONNECTORS

- SI82YF:** 2 female - 1 male
- SI82YM:** 2 male - 1 female

INTERCONNECTS: 6000 SERIES

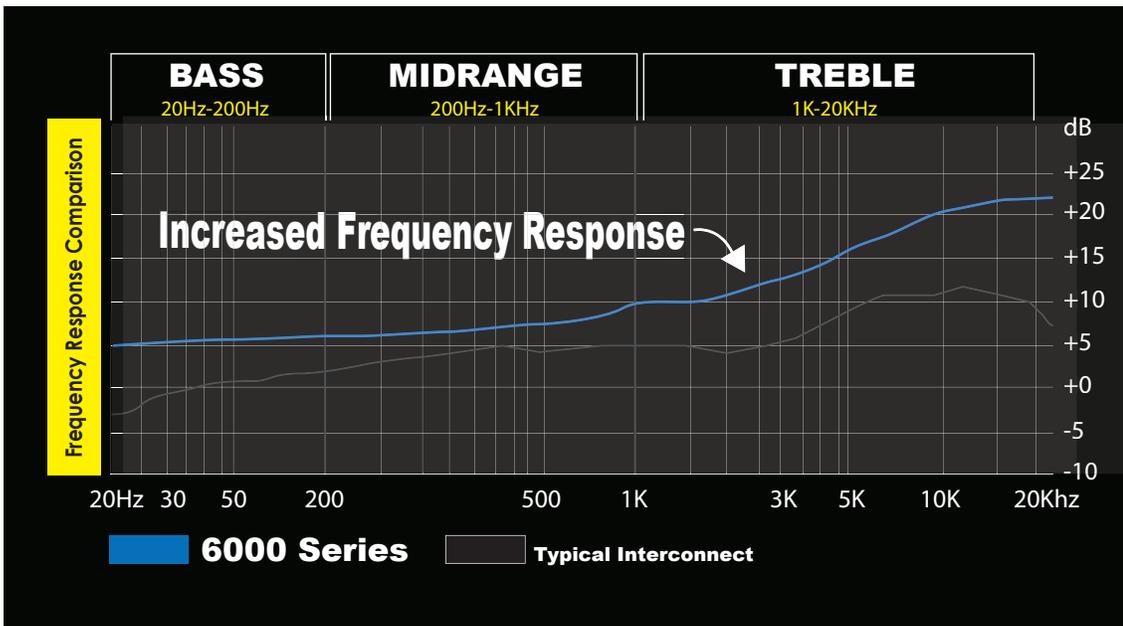

FEATURES:

- ▶ Stinger Audiophile Grade Design Improves Sound Quality, Noise Rejection, and Offers Easy Installation
- ▶ Oversized OFC Conductors Provide Excellent Sound Quality
- ▶ Continuous Connection Construction (C3 Tech) Provides Unmatched Signal Transfer
- ▶ Mylar Shielding for Increased Noise Rejection
- ▶ Directional Twisted-Pair Construction Provides Protection against Interference
- ▶ Split-Tip Machined Metal Connector Allows Better Signal Transfer
- ▶ Twisted Pair Winding Patterns Improve Clarity and Broaden Dynamic Range
- ▶ Blue Protective Jacket Looks Great and Minimizes Friction for Easy Install
- ▶ Molded Strain Reliefs for Excellent Durability
- ▶ 3 Conductors per Channel for a Total of 6 Conductors (2 Channels)
- ▶ Color Coded Channel Identification



2-CHANNEL INTERCONNECTS

- SI6220:** Length: 20Ft/6.1m
- SI6217:** Length: 17Ft/5.2m
- SI6212:** Length: 12Ft/3.7m
- SI626:** Length: 6Ft/1.8m
- SI623:** Length: 3Ft/0.9m


4-CHANNEL INTERCONNECTS

- SI6420:** Length: 20Ft/6.1m
- SI6417:** Length: 17Ft/5.2m
- SI6412:** Length: 12Ft/3.7m

Y CONNECTORS


- SI62YF:** 2 female - 1 male
- SI62YM:** 2 male - 1 female

INTERCONNECTS: 4000 SERIES

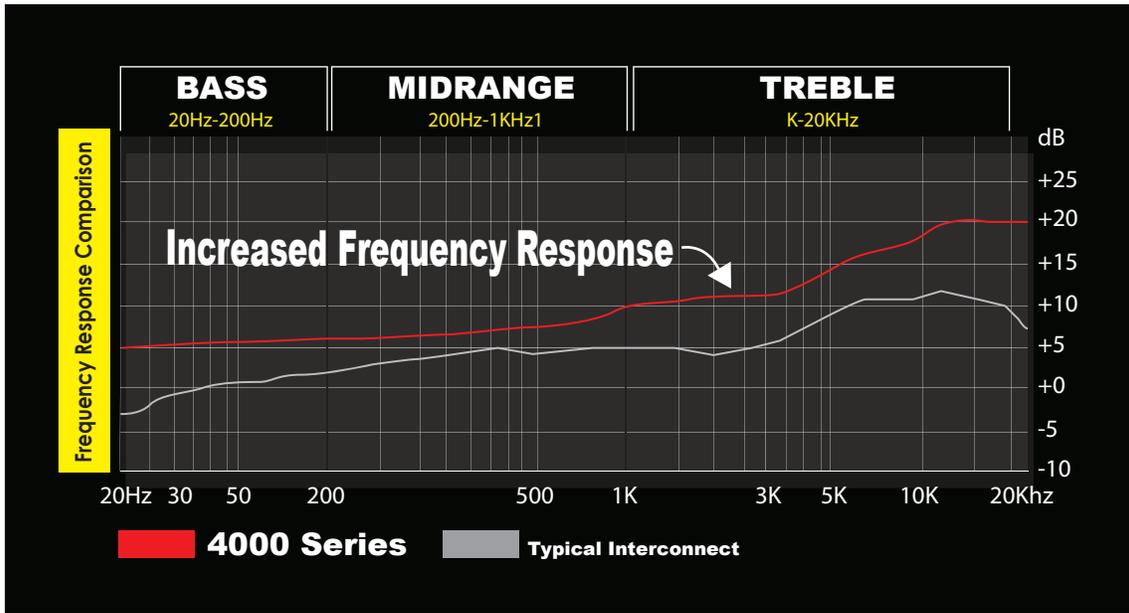

FEATURES

- ▶ Stinger Audiophile Grade Design Improves Sound Quality, Noise Rejection, and Offers Easy Installation
- ▶ Oversized OFC Conductors Provide Excellent Sound Quality
- ▶ Continuous Connection Construction (C3 Tech) Provides Unmatched Signal Transfer
- ▶ Split-Tip Connector Allows Better Signal Transfer
- ▶ Stinger Audiophile Grade Design Improves Sound Quality, Noise Rejection, and Offers Easy Installation
- ▶ Compact Connector Design for Easy Installation
- ▶ Twisted Pair Winding Patterns Improve Clarity and Broaden Dynamic Range
- ▶ Minimalistic Clear Protective Jacket Looks Great and Minimizes Friction for Easy Install
- ▶ Molded Strain Reliefs for Extra Durability
- ▶ Directional Twisted-Pair Construction Provides Protection against Interference
- ▶ Stingers Proprietary Shoc-Krome-Plated Connectors for Excellent Signal Transfer
- ▶ Color Coded Channel Identification

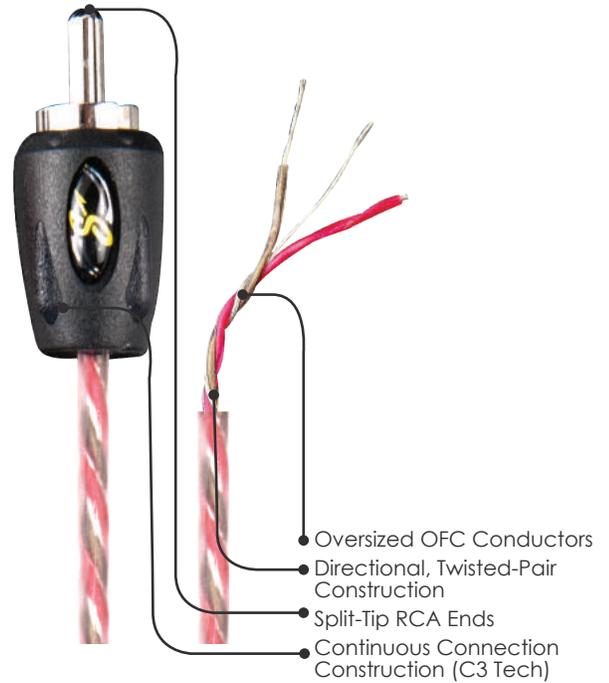

2-CHANNEL INTERCONNECTS

- SI4220:** Length: 20Ft/6.1m
- SI4217:** Length: 17Ft/5.2m
- SI4215:** Length: 15Ft/4.6m
- SI4212:** Length: 12Ft/3.7m
- SI429:** Length: 9Ft/2.7m
- SI426:** Length: 6Ft/1.8m
- SI423:** Length: 3Ft/0.9m
- SI421.5:** Length: 1.5Ft/0.5m

4-CHANNEL INTERCONNECTS

- SI4420:** Length: 20Ft/6.1m
- SI4417:** Length: 17Ft/5.2m
- SI4412:** Length: 12Ft/3.7m

6-CHANNEL INTERCONNECTS

- SI4620:** Length: 20Ft/6.1m
- SI4617:** Length: 17Ft/5.2m
- SI4612:** Length: 12Ft/3.7m
- 3.5mm TO RCA
- SI436:** Length: 6Ft/1.8m
- SI433:** Length: 3Ft/0.9m
- 3.5mm TO 3.5mm
- SI416:** Length: 6Ft/1.8m
- SI413:** Length: 3Ft/0.9m


AUDIO/VIDEO

- SI4920:** Length: 20Ft/6.1m
- SI4917:** Length: 17Ft/5.2m
- SI4912:** Length: 12Ft/3.7m
- SI496:** Length: 6Ft/1.8m
- SI493:** Length: 3Ft/0.9m

VIDEO


- SI4820:** Length: 20Ft/6.1m
- SI4817:** Length: 17Ft/5.2m
- SI4812:** Length: 12Ft/3.7m
- SI486:** Length: 6Ft/1.8m
- SI483:** Length: 3Ft/0.9m

INTERCONNECTS: 1000 SERIES

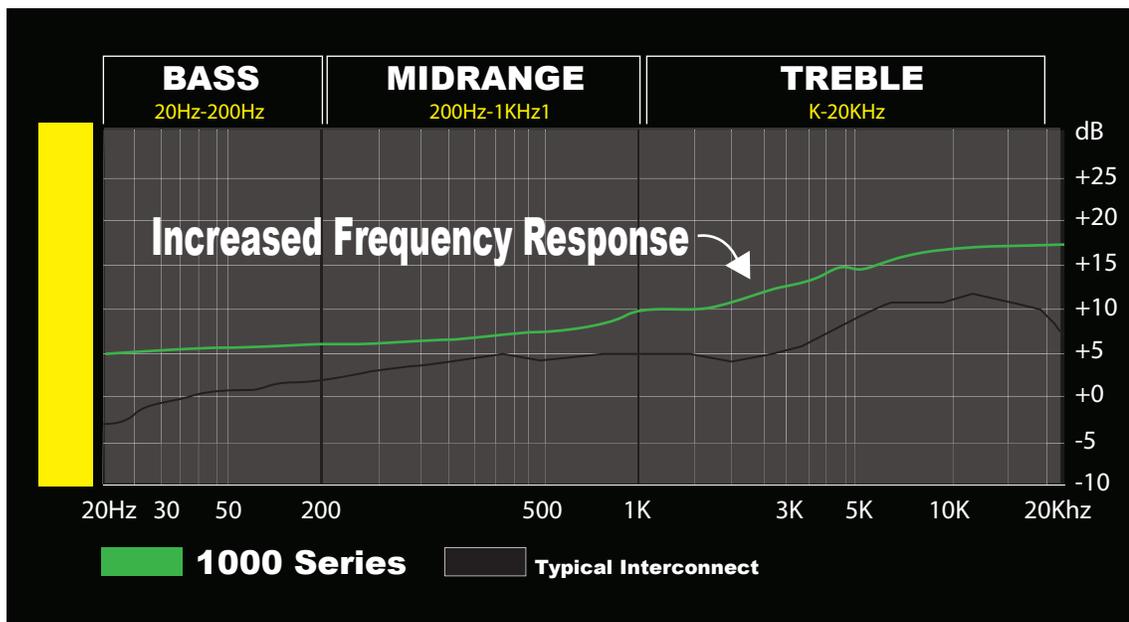

FEATURES

- ▶ Audiophile Grade Performance on a Budget
- ▶ Co-Axial Construction with Two Conductors per Channel
- ▶ Compact Molded Ends with Colored Channel Identifiers
- ▶ Noise Rejecting Coaxial Construction
- ▶ Heavy Gauge Conductors Provide Great Sound Quality
- ▶ High Strength Molded Strain Reliefs for Excellent Durability
- ▶ Continuous Connection Construction (C3 Tech) Provides Unmatched Signal Transfer
- ▶ Shoc-Krome Ends for High Quality Performance without Corrosion

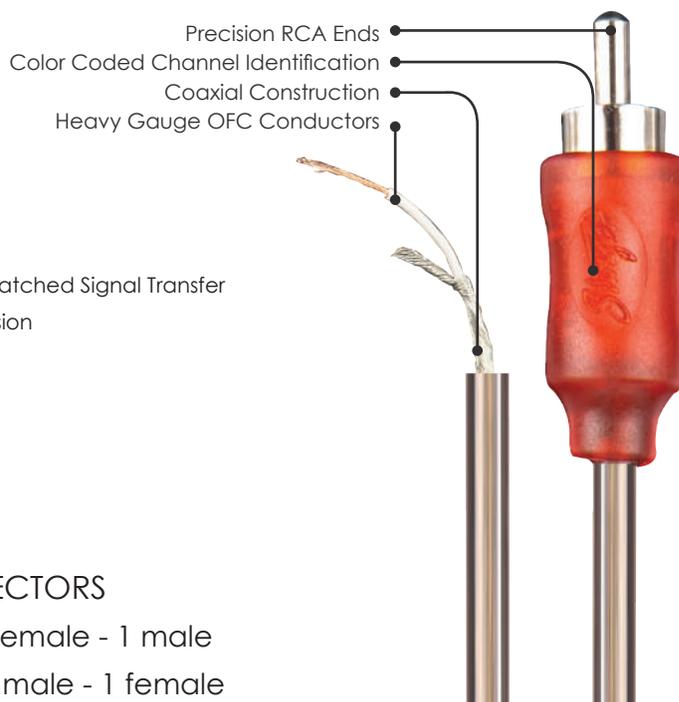

2-CHANNEL INTERCONNECTS

SI1220: Length: 20Ft/6.1m

SI1217: Length: 17Ft/5.2m

SI1215: Length: 15Ft/4.6m

SI1212: Length: 12Ft/3.7m

SI129: Length: 9Ft/2.7m

SI126: Length: 6Ft/1.8m

SI123: Length: 3Ft/0.9m

SI121.5: Length: 1.5Ft/0.5m

Y CONNECTORS

SI12YF: 2 female - 1 male

SI12YM: 2 male - 1 female



Stinger marine interconnect cables are specifically designed to thrive in the marine environment, enhancing your audio experience off-shore.

- ▶ Comprised of Tinned OFC Copper Conductors with Polyethylene Dielectrics Assembled in a High Rate Twisted-Pair Configuration for Ultimate Noise Rejection
- ▶ The White Outer PVC Jacket is Flexible for Easy Routing through Tight Spaces.
- ▶ Molded Connectors with Machined, Nickel-Plated, Brass Contacts Offer Superior Connection Integrity, Signal Transfer and Maximum Corrosion Resistance
- ▶ SMRAUX Input Utilizes a Splash-Proof Cover to Keep the Connections Intact*

*Only Available on SMRAUX and SMAUXUSB3



SEE SPECIALITY VEHICLE SECTIONS IN THIS CATALOG FOR OUR FULL OFF-ROAD AND OFF-SHORE RANGE

NOTES:

Stinger

RoadKill

OBLITERATE UNWANTED NOISE WITH ROADKILL SOUND DAMPING SOLUTIONS

- ▶ Kills panel resonance, squeaks, and rattles
- ▶ Improves overall audio frequency response and bass output
- ▶ For use on all metal panels, doors, roof, floor, firewall & trunk
- ▶ Self-adhesive for easy installation

SOLUTIONS ENGINEERED FOR SPECIFIC APPLICATIONS
DELIVERING ULTIMATE PERFORMANCE

ULTIMATE - Joining our Expert and Overkill materials for the Ultimate noise killer, comprised of an acoustic foam outer layer, aluminum middle layer, and a proprietary, ultra-dense butyl blend bottom layer

EXPERT- Unlimited uses, material built from an aluminum outer layer (6 mils), and an ultra-dense butyl blend bottom layer (0.65 lbs/ft²)

STEALTH- When you want premium sound damping without the weight, at 0.45 lbs/ft² Stealth is comprised of a black aluminum layer at 4 mils with a lightweight butyl layer

HOOD LINER- Isolates engine noise and heat, comprised of a heat reflecting aluminum layer with heat-resistant and sound absorbing foam layer

OVERKILL- Dense 1/4" foam for interior door panel damping, decimates high frequency noise and commonly used as a barrier/gasket material

CARPET PAD- Used under carpet for a massive reduction in low frequency road noise, a dual layer construction with a dense rubber barrier and foam isolation

SPEAKER WAVE RINGS- Installed behind door speakers to reduce distortion, acoustic foam disperses standing waves for enhanced sound quality

FAST RINGS- Increases speaker output, improves the projection of the audio into the car cabin and reduces unwanted rear reflections that can degrade the sound, includes gasket for speaker mounting to the baffle plate surface, middle ring to mount around the outer edge of the speaker and circular foam pad that goes behind the speaker to absorb unwanted reflections





SGM104N
Slatwall Header



SGM9
Tabletop or Slatwall Interactive Display
17" x 17"



SGMRK
Tabletop or Slatwall Material Display
14" x 14"



SGM8N
Floor Standing Display

RoadKill ULTIMATE

RoadKill Ultimate combines the benefits of our Expert aluminum/butyl material and Overkill acoustic foam to create the ultimate noise killer. The combination of these two products will more than double the results than when used on their own.

Reduce a massive amount of unwanted resonating noise (panel vibrations, road noise, exhaust, engine noise & vibration) allowing your audio system to sound even louder and with more clarity and definition.

FEATURES:

- ▶ Improves overall audio frequency response and bass output
- ▶ Kills panel resonance, squeaks and rattles
- ▶ Self-adhesive for easy installation
- ▶ Use on all metal panels, doors, roof, floor, firewall & trunk
- ▶ Highest damping vs. weight ratio of any material available
- ▶ Waterproof


| RoadKill Ultimate | |
|-------------------|-------------------------------|
| Minimum Thickness | 5.5mm |
| Weight | 0.55lbs/ft² |
| Aluminum Layer | 3 mil |
| Foam Layer | 2 mil |

ROADKILL ULTIMATE DNA

Acoustic foam outer layer that absorbs and diffuses high frequency sounds, acts as a thermal barrier, and absorbs soundwaves that are otherwise trapped inside the empty space behind door panels.

Aluminum middle layer helps with heat dissipation.

Proprietary, ultra-dense butyl blend bottom layer absorbs acoustical energy that causes unwanted rattles and reduces vibrations.

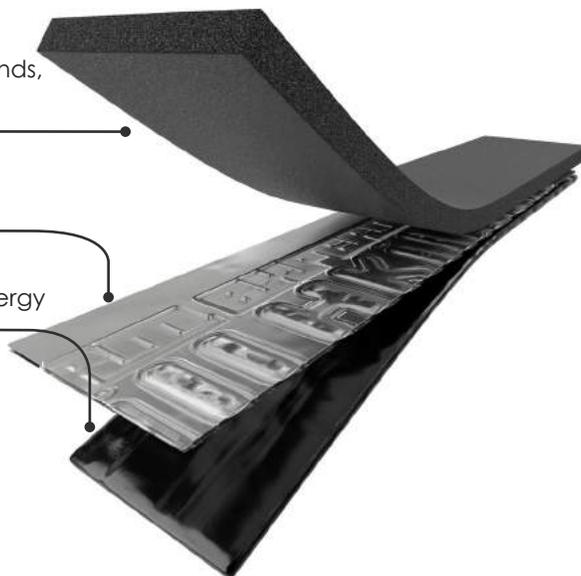

SVTRKSG1 and SVTRKR1

Harley-Davidson Pre-cut Fairing Damping Kits

Pre-cut for the perfect fit with:

- ▶ 1998-2013 Harley-Davidson Ultra Classic Street Glide (SVTRKSG1) or
- ▶ 1998-2013 Harley-Davidson Road Glide (SVTRKR1) fairings



Ultimate Universal Kit

RKU8

8 sq-ft total
2/pack (18" x 32")



Ultimate Bulk Pack

RKU36

36 sq-ft total
9/pack (18" x 32")



RoadKill EXPERT

| RoadKill Expert | |
|-------------------|-------------------------------|
| Minimum Thickness | 0.080in |
| Weight | 0.65lbs/ft² |
| Aluminum Layer | 6 mil |



ROADKILL EXPERT FEATURES:

- ▶ Aluminum outer layer
- ▶ Self-adhesive
- ▶ Easy installation
- ▶ Use on all metal panels, doors, roof, floor, firewall & trunk
- ▶ Kills panel resonance, squeaks and rattles
- ▶ Highest damping vs. weight ratio of any material available
- ▶ Improves overall audio frequency response and bass output



Bulk Pack
RKX80B
80 sq-ft total
Black foil roll



Bulk Pack
RKX36B
36 sq-ft. total
9/pack (18" x 32")



Trunk Kit
RKXTK
20 sq-ft total
10/pack (12" x 24")



Door Kit
RKXDK
12 sq-ft total
6/pack (12" x 24")



Speaker Kit
RKXSK
1.7 sq-ft
2/pack (10" x 12")



Universal Kit
RKX4
4 sq-ft total
2/pack (12" x 24")



License Plate Kit
RKXLIC
Includes frame
(4" x 12" + 2" x 6")

RoadKill Stealth

- Stealth black aluminum
- Lightweight construction
- Self-adhesive
- Easy Installation
- Similar performance to Expert Series
- 25% Less weight

| | RoadKill Stealth |
|-------------------|-------------------------------|
| Minimum Thickness | 1.55mm |
| Weight | 0.45lbs/ft² |
| Aluminum Layer | 2 mil |

Stealth Bulk Pack

RKST36B
36 sq-ft. total
9/pack (18" x 32")

Stealth Speaker Kit

RKSTSK
1.7 sq-ft.
2/pack (10" x 12")



RoadKill Overkill

- Self-adhesive
- Dense 1/4" foam
- Easy conformability
- Interior panel damping
- Recommended for any installation that requires removal of panels
- Eliminates annoying interior squeaks and rattles

OverKill Foam Mat

RKO12
12 sq-ft. total
1/pack (46" x 38")



RoadKill Overkill

| | |
|-------------------|-------------------------------|
| Minimum Thickness | 6mm |
| Weight | 0.25lbs/ft² |



RoadKill Carpet Pad

- Dual layer construction
- Dense rubber barrier
- Dense foam isolation
- Easy cut & apply for installation under factory carpet
- Insulates vehicle for more efficient HVAC
- Huge reduction in low frequency road noise, which reduces driving fatigue

Carpet Pad Pack

RKCP12
12 sq-ft. total
1/pack (46" x 38")
.365" Thick

Carpet Pad

| | |
|-------------------|-------------------------------|
| Minimum Thickness | 7.8mm |
| Weight | 0.41lbs/ft² |



RoadKill Hood Liner

- Temp Rating: 105°C/221°F
- Isolates engine noise & heat
- Lightweight construction
- Self-adhesive
- Easy installation
- Diesel, turbocharged, or supercharged engines will benefit from RoadKill Hood Liner
- Conforms easily to particular hood applications
- Reduces engine noise through hood

Hood Liner Kit

RKXHL
12 sq-ft. total
1/pack (46" x 38")
1" Thick



Hood Liner

| | |
|-------------------|-------------------------------|
| Minimum Thickness | 10mm |
| Weight | 0.12lbs/ft² |



SPEAKER STANDING WAVE RINGS

Eliminate increased distortion and decreased bass response caused by standing waves with one quick-step install Stinger RoadKill Speaker Standing Wave Rings. Stinger RoadKill Speaker Standing Wave Rings absorb and deflect rear energy from the back of the speaker, keeping the energy from returning and interfering with the front wave output. The easy peel and stick adhesive allows for fast, clean installation when adding these rings to speaker installs, while the egg crate acoustic foam decreases distortion and increases bass response.

RKSP2

2/Pack (130mm ea)
Black foil roll
Waterproof

Without Wave Rings, standing waves are reflected, diminishing sound quality



With Wave Rings, the energy is absorbed, delivering pure sound.



FAST RINGS

Our 3-piece foam ring speaker enhancement system solves the problem of acoustically coupling aftermarket speakers to factory speaker openings. The RoadKill Fast Rings kit increases speaker output, improves the projection of the audio into the car cabin and reduces unwanted rear reflections that can degrade the sound.

RKFR6 fits 6" and 6.5" Speakers


RKFR69 fits 6 x 9" Speakers

RKFR5 fits 5" and 5.25" Speakers

RKFR5768 fits 5 x 7" and 6 x 8" Speakers

INCLUDES:

1. Circular foam pad goes behind the speaker to absorb unwanted reflections on hard surfaces, such as inside a car door
2. Middle ring to mount around the outer edge of the speaker
3. Gasket for speaker mounting to the baffle plate surface

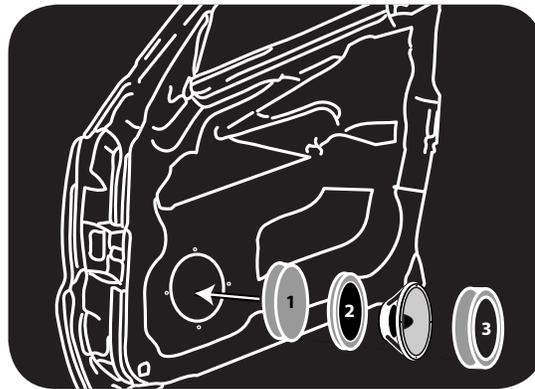


RoadKill Tools

Roller Tool
RKROLLER2
Roller only



Combo Kit
RKINSTALL
Razor Knife & Roller



| PART NUMBER | WATTAGE | SERIES |
|-------------|---------|---------------------------|
| SPP250 | 6000+ | POWER ² SERIES |
| SEA27 | 4300+ | MARINE SERIES |
| SEA31 | 4300+ | MARINE SERIES |
| SPP2150 | 4300+ | POWER ² SERIES |
| SPP1750DC | 3250+ | POWER ² SERIES |
| SPP1700 | 3150+ | POWER ² SERIES |
| SPP1500DC | 3000+ | POWER ² SERIES |
| SPP1500DCR | 3000+ | POWER ² SERIES |
| SPP1300C | 2600+ | POWER ² SERIES |
| SPX1200 | 2400+ | POWER SPORTS |
| SPP1200 | 2400+ | POWER ² SERIES |
| SPP1300C | 2600+ | POWER ² SERIES |
| SPV71 | 2100+ | POWER SERIES |
| SPV69C | 2000+ | POWER SERIES |
| SPP925 | 1850+ | POWER ² SERIES |
| SPX925-HD | 1850+ | HARLEY-DAVIDSON |
| SPX925 | 1850+ | POWER SPORTS |
| SPP680 | 1360+ | POWER ² SERIES |
| SPV44 | 1320+ | POWER SERIES |
| SPV35 | 1050+ | POWER SERIES |
| SPV20 | 600+ | POWER SERIES |

Batteries

Stinger batteries are the heart of your sound system. They provide the quality and performance needed to run the kind of powerful system any car audio enthusiast would love.

**POWER² SERIES
MARINE SERIES
POWER SPORTS SERIES**

POWER SERIES

3-Year Warranty

1-Year Warranty


More Power per Pound Than Any Other AGM/Lead Acid Battery



- Powerful AGM (Absorbed Glass Mat) Technology
- Corrosion and Maintenance-Free
- Durable Machined Copper-Alloy Terminal Posts
- Protective Metal Jacket
- High Energy Thin Plate Design

VERSUS

- Poor Battery Life / Installation Flexibility
- Weak Connections
- Inferior Power to Weight Ratio
- Damaged by Vibration
- Performance-Limiting Design

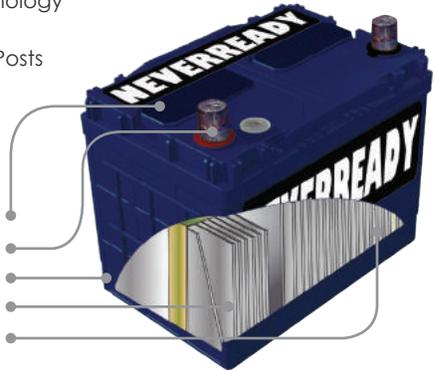

OEM BATTERIES GROUP SIZE QUICK REFERENCE GUIDE

| GROUP | WATTS | PART |
|-------|-------|-------------|
| 24F | 3000+ | SPP1500DCR* |
| 31 | 4300+ | SPP2150 |
| 34 | 3000+ | SPP1500DC |
| 34 | 2000+ | SPV69C |
| 34M | 3000+ | SPP1500DC |
| 34M | 2000+ | SPV69C |
| 34R | 3000+ | SPP1500DCR |
| 35 | 3000+ | SPP1500DCR* |
| 51 | 1050+ | SPV35 |
| 65 | 3250+ | SPP1750DC |
| 75 | 2600+ | SPP1300C |
| 78 | 3000+ | SPP1500DC |
| 78 | 2000+ | SPV69C |
| 86 | 2400+ | SPP1300C |

*FITS MOST VEHICLES IN GROUP



SGM4
3-Tier Battery Rack

BATTERIES: POWER² SERIES

SPP2250

6000+ WATTS



Features:

- ▶ CCA: 1420A
- ▶ Peak Discharge: 5000+ Amps
- ▶ 5 Second Cranking Amps: 2250A
- ▶ Internal Resistance: <2.2 mOhms
- ▶ 120Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (8.11"H x 10.43"W x 11.02"L) (8.27" Total Height)
- ▶ (206mmH x 265mmW x 280mmL) (210mm Total Height)
- ▶ Weight: 85.32 lbs / 38.7kg

SPP2150

OEM FIT 4300+ WATTS GROUP 31



Features:

- ▶ CCA: 1050A
- ▶ Peak Discharge: 5000+ Amps
- ▶ 5 Second Cranking Amps: 2150A
- ▶ Internal Resistance: <2.2 mOhms
- ▶ 105Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ Group 31 - Marine standard
- ▶ (8.43"H x 6.77"W x 12.99"L) (8.66" Total Height)
- ▶ (214mmH x 172mmW x 330mmL) (220mm Total Height)
- ▶ Weight: 74.96 lbs / 34kg

SPP1750DC

OEM FIT 3250+ WATTS, GROUP 65



Features:

- ▶ CCA: 950A
- ▶ Peak Discharge: 3400+ Amps
- ▶ 5 Second Cranking Amps: 1750A
- ▶ Internal Resistance: <3.1 mOhms
- ▶ 75Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ Group 65
- ▶ (6.67"H x 7.01"W x 11.81"L) (7.38" Total Height)
- ▶ (169.5mmH x 178mmW x 300mmL) (187.5mm Total Height)
- ▶ Weight: 561lbs / 25.4

SPP1700

3150+ WATTS



Features:

- ▶ CCA: 1050A
- ▶ Peak Discharge: 3300+ Amps
- ▶ 5 Second Cranking Amps: 1700A
- ▶ Internal Resistance: <3.5 mOhms
- ▶ 70Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (7.05"H x 6.57"W x 13.82"L)
- ▶ (179mm H x 167mm W x 351mm L)
- ▶ Weight: 54.67./ 24.8kg

SPP1500DC

OEM FIT 3000+ WATTS, GROUP 34/34M/78



Features:

- ▶ CCA: 825A
- ▶ Peak Discharge: 3100+ Amps
- ▶ 5 Second Cranking Amps: 1500A
- ▶ Internal Resistance: <3.0 mOhms
- ▶ 65Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ OEM Mounting including GM/Ford and other Group 34/34M/78 vehicles
- ▶ (7.19"H x 7.09"W x 10.28"L) (8.15" Total Height)
- ▶ (182.5mmH x 180mmW x 261mmL) (207mm Total Height)
- ▶ Weight: 46.52lbs / 21.10kg

SPP1500DCR

OEM FIT 3000+ WATTS, GROUP 34R / MOST 24F/35 (RIGHT HAND POSITIVE TERMINAL)



Features:

- ▶ CCA: 825A
- ▶ Peak Discharge: 3100+ Amps
- ▶ 5 Second Cranking Amps: 1500A
- ▶ Internal Resistance: <3.0 mOhms
- ▶ 65Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ OEM Mounting including Nissan/Honda and other Group 34R (Most 24F/35) vehicles (right hand positive terminal)
- ▶ (7.19"H x 7.09"W x 10.28"L) (8.15" Total Height)
- ▶ (182.5mmH x 180mmW x 261mmL) (207mm Total Height)
- ▶ Weight: 46.52lbs / 21.10kg

SPP1300C

OEM FIT 2600+ WATTS, GM AND GROUP 75/86



Features:

- ▶ CCA: 560A
- ▶ Peak Discharge: 2600+ Amps
- ▶ 5 Second Cranking Amps: 1200A
- ▶ Internal Resistance: <4.0 mOhms
- ▶ 44Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ OEM Mounting including GM and other Group 75/86 vehicles
- ▶ (7.48"H x 6.89"W x 9.49"L)
- ▶ (190mmH x 175mmW x 241mmL)
- ▶ Weight: 42.11lbs / 19.10kg

SPP1200

2400+ WATTS



Features:

- ▶ CCA: 560A
- ▶ Peak Discharge: 2600+ Amps
- ▶ 5 Second Cranking Amps: 1200A
- ▶ Internal Resistance: <4.0 mOhms
- ▶ 5 hour rate: 7.48A/37.4Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (6.69"H x 6.54"W x 7.80"L)
- ▶ (170mmH x 166mmW x 198mmL)
- ▶ Weight: 33.29lbs / 15.10kg

BATTERIES: POWER² + POWER SERIES

SPP925

1850+ WATTS



Features:

- ▶ CCA: 410A
- ▶ Peak Discharge: 2400+ Amps
- ▶ 5 Second Cranking Amps: 925A
- ▶ Internal Resistance: <5.0 mOhms
- ▶ 28Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (4.92"H x 6.93"W x 6.50"L)
- ▶ (125.5mmH x 176mmW x 165mmL)
- ▶ Weight: 23.59lbs / 10.70kg

SPP680

1360+ WATTS



Features:

- ▶ CCA: 230A
- ▶ Peak Discharge: 1800+ Amps
- ▶ 5 Second Cranking Amps: 680A
- ▶ Internal Resistance: <5.5 mOhms
- ▶ 5 hour rate: 3.4A/17Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (6.57"H x 3.03"W x 7.13"L)
- ▶ (167mmH x 77mmW x 181mmL)
- ▶ Weight: 15.43 lbs / 7kg

SPV70

2100+ WATTS



Features:

- ▶ CCA: 875A
- ▶ 5 Second Cranking Amps: 1050A
- ▶ Internal Resistance: <4 mOhms
- ▶ 70Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (7.05"H x 6.57"W x 13.82"L)
- ▶ (179mmH x 167mmW x 351mmL)
- ▶ Weight: 54.67 / 24.8kg

SPV69C

OEM FIT 2000+ WATTS GM/FORD
AND GROUP 34/34M/78



Features:

- ▶ CCA: 775A
- ▶ 69Ah
- ▶ Internal Resistance: <4 mOhms
- ▶ 5 Second Cranking Amps: 1100A
- ▶ Side Terminals Available Separately (SPT55310)
- ▶ Includes Metal Jacket
- ▶ OEM Mounting Foot GM/Ford

Dimensions:

- ▶ (7.19"H x 7.09"W x 10.28"L) (8.15" Total Height)
- ▶ (182.5mmH x 180mmW x 261mmL) (207mm Total Height)
- ▶ Weight: 46.52lbs / 21.10kg
- ▶ OEM Mounting including Honda and other Group 51* vehicles

*some applications require modification for polarity

SPV44

1320+ WATTS



Features:

- ▶ CCA:550A
- ▶ 5 Second Cranking Amps: 725A
- ▶ Internal Resistance: <5 mOhms
- ▶ 44Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (6.69"H x 6.54"W x 7.80"L)
- ▶ (198mmH x 166mmW x 170mmL)
- ▶ Weight: 33.29 lbs / 15.10kg

SPV35

OEM FIT 1050+ WATTS HONDA AND GROUP 51



Features:

- ▶ CCA: 438A
- ▶ 5 Second Cranking Amps: 525A
- ▶ Internal Resistance: <6 mOhms
- ▶ 35Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (6.57" H x 5.16" W x 7.72"L)
- ▶ (167mm H x 131mm W x 196mmL)
- ▶ Weight: 26.68 lbs / 12.1 kg
- ▶ OEM Mounting including Honda and other Group 51* vehicles

*some applications require modification for polarity

SPV20

600+ WATTS

Features:

- ▶ CCA: 230A
- ▶ 5 Second Cranking Amps: 300A
- ▶ Internal Resistance: <6 mOhms
- ▶ 20Ah
- ▶ Metal Jacket Sold Separately (SPCASE)

Dimensions:

- ▶ (6.57"H x 3.03"W x 7.13"L)
- ▶ (167mmH x 77mmW x 181mmL)
- ▶ Weight: 15.43 lbs / 7kg



SPCASE

Features:

- ▶ Protects battery from puncture
- ▶ Enables higher heat applications
- ▶ Provides mounting options
- ▶ Works with SPV20



SPT55310

Adds side power hook ups to batteries that come with copper-alloy posts, Converts Stinger battery to GM Side Post. Includes short & long style.



FITS: SPP1500DC,
SPP1500DCR, SPP1300C,
SPV69



HARLEY-DAVIDSON AUDIO ACCESSORIES

Features:

- ▶ Advanced absorbed glass mat technology for longer life, more power & greater reliability
- ▶ Direct replacement for easy installation
- ▶ High density construction, more power in the same space
- ▶ Brass alloy posts for higher current transfer & corrosion resistance
- ▶ Pure lead plates keep the battery charged for longer periods of time
- ▶ Thin plates allow more power on demand for easier starting while powering multiple accessories

ACCESSORIZE YOUR HARLEY

The Stinger Harley-Davidson line is built to complement any sound system upgrade, improving sound quality and component efficiency. Our direct replacement battery is just the start, discover our full line in the V-Twin section in this catalog. Sound damping, radio replacement kits and more.

SPX925-HD

HARLEY-DAVIDSON DIRECT REPLACEMENT BATTERY

- Watts: 1850+
- CCA: 410A
- Peak Discharge: 2400+ Amps
- 5 Second Cranking Amps: 925A
- Internal Resistance: <5.0 mOhms
- 28Ah
- 3 Year Full Replacement Warranty

Dimensions:

- (4.92"H x 6.93"W x 6.50"L)
- (125.5mmH x 176mmW x 165mmL)
- Weight: 23.59lbs / 10.70kg

- Replaces the following batteries:
66010-97C, 66010-97B, 66010-97A,
66010-97



MARINE BATTERIES

SEA31 GROUP 31



- ▶ 4300 Watts
- ▶ 12v Dry Cell Valve Regulated Lead Acid Battery (AGM)
- ▶ Good for over 400 full discharge cycles
- ▶ Quickly delivers power with an internal resistance of <2.2 mOhms
- ▶ 20 hour rate: 5.25A/105Ah
- ▶ 5 hour rate: 17.8A/89Ah
- ▶ 1/2 hour rate: 130A/65Ah
- ▶ 5 Second Cranking Amps: 2150A
- ▶ CCA: 1050A
- ▶ Peak Discharge: >5000 A

Dimensions:

- ▶ (9.40"H x 13.0"W x 6.80"D)
- ▶ Weight: 74.96 lbs

SEA27 GROUP 27



- ▶ 4300 Watts
- ▶ 12v Dry Cell Valve Regulated Lead Acid Battery (AGM)
- ▶ Good for over 400 full discharge cycles
- ▶ Quickly delivers power with an internal resistance of <3.0 mOhms
- ▶ 20 hour rate: 3.9A/75Ah
- ▶ 5 hour rate: 12.5A/62.5Ah
- ▶ 1/2 hour rate: 109A/54.5Ah
- ▶ 5 Second Cranking Amps: 1750A
- ▶ CCA: 950A
- ▶ Peak Discharge: >3400 A

Dimensions:

- ▶ (8.31"H x 12.09"W x 6.65"D)
- ▶ Weight: 59.56 lbs

POWER SPORTS BATTERIES

SPX925

Vibration Resistant Power Sports Battery



Features:

- ▶ Watts: 1850+
- ▶ CCA: 410A
- ▶ Peak Discharge: 2400+ Amps
- ▶ 5 Second Cranking Amps: 925A
- ▶ Internal Resistance: <5.0 mOhms
- ▶ 28Ah
- ▶ Includes Metal Jacket
- ▶ 3 Year Full Replacement Warranty

Dimensions:

- ▶ (4.92"H x 6.93"W x 6.50"L)
- ▶ (125.5mmH x 176mmW x 165mmL)
- ▶ Weight: 23.59lbs / 10.70kg

SPX1200

Vibration Resistant Power Sports Battery



Features:

- ▶ Watts: 2400+
- ▶ CCA: 560A
- ▶ Peak Discharge: 2600+ Amps
- ▶ 5 Second Cranking Amps: 1200A
- ▶ Internal Resistance: <4.0 mOhms
- ▶ 5 hour rate: 7.48A/37.4Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (6.69"H x 6.54"W x 7.80"L)
- ▶ (170mmH x 166mmW x 198mmL)
- ▶ Weight: 33.29lbs / 15.10kg

SPXRZRBAT2 SECOND BATTERY INSTALLATION KIT FOR 2014+ POLARIS RZR

- ▶ OEM style battery bracket with hardware
- ▶ 200 Amp pre-wired isolator relay
- ▶ 90° RZR battery terminals
- ▶ Compatible with 2-seat and 4-seat models

NOTE: Requires SPX925 - Sold Separately



BATTERY ACCESSORIES AND CHARGERS

SPTG1

BATTERY CONDUCTANCE TESTER

Quickly and accurately measure the actual CCA or CA capability of 12v batteries, healthy state of the battery itself, and common fault of the vehicle starting system and charging system, which can help to troubleshoot the root cause of a problem quickly and accurately.

FEATURES

- ▶ Conductance technology, simple, fast, accurate
- ▶ Vehicle battery test
- ▶ Vehicle charging system test
- ▶ Vehicle starting system test
- ▶ Use the USB interface to connect to the computer



SPJS1

JUMP STARTER AND POWER PACK

Features:

- ▶ Powerful capability to jump start vehicles with 12V batteries
- ▶ LED flashlight with 3 modes (lighting, burst flashing, SOS)
- ▶ USB power supply for charging any USB device: Mobile phone, tablet, PC, MP3/MP4, PSP, camera and other digital devices
- ▶ Compact design for easy storage and portability (135mm x 76mm x 16mm); Weight: 222g
- ▶ Enough power to jump start multiple vehicles on one charge

Specs:

- ▶ Capacity: 6000mAh
- ▶ Input: 12V/1A; Output: 5V/2A
- ▶ Start current: 200A; Peak current: 400A
- ▶ Charging time 2 Hrs
- ▶ Operation temp. 20°C ~60°C/-4°F~120°F
- ▶ Lifetime: >1000 cycles
- ▶ Protections Circuits: Short circuit proof, over charge protection & discharge protection
- ▶ Compliance Certifications: CE/FCC/ROHS



SBC6A

6 AMP BATTERY CHARGER/TENDER

Features:

- ▶ 6 Amp Battery Charger* / Maintainer (Stinger AGM)
- ▶ Microprocessor-Controlled for Optimum Charging
- ▶ Compact Size is Perfect for In-Vehicle Installation
- ▶ Maintains Batteries for Peak Performance
- ▶ Will Not Overcharge Stinger AGM Batteries



5 1/4" L x 1 7/8" H x 5" W

* Not designed to bring a dead battery back to full charge. For best battery life, recharge on high output charger and use SBC6A to maintain charge and for storage.

BATTERY ACCESSORIES: POWER SUPPLY

STINGER POWER SUPPLIES

Load and ambient conditions monitoring and sensing, and supplies "clean" nominal 13.6 VDC power from input voltages that range from 90-130 VAC. Operates with or without a battery connected; the output of the Stinger Power Supply is a regulated, filtered D.C. voltage that can power sensitive electronics without the need of a battery or other filtering.

Features:

- ▶ High Current Power Supply
- ▶ Battery charger (when used with optional SCM)
- ▶ Temperature regulated fan cooling
- ▶ Can be paralleled for higher output requirements
- ▶ Charging module SCM sold separately

SCM

Charging Module for Stinger Power Supplies (SPS70, SPS60, SPS40)

- ▶ Converts Stinger Power Supply into Battery Charger
- ▶ Microprocessor Controlled for Proper Charging
- ▶ Maintains Power Supply Capability in Boost Mode
- ▶ Selectable Charging Modes, Boost, Normal, Equalizing and Storage for any Charging Requirement
- ▶ Maintains Batteries for Peak Performance



SPS70

70 AMP POWER SUPPLY

Features:

- ▶ Input: 105-130 VAC 60 Hz
- ▶ 1250 Watts
- ▶ Output: 13.6 VDC, 70 Amps
- ▶ Dimensions: 3.6" H X 9.15" L X 9" W



SPS60

60 AMP POWER SUPPLY

Features:

- ▶ Input: 105-130 VAC 60 Hz
- ▶ 1000 Watts
- ▶ Output: 13.6 VDC, 60 Amps
- ▶ Dimensions: 3.6" H X 9.15" L X 9" W



SPS40


40 AMP POWER SUPPLY

Features:

- ▶ Input: 105-130 VAC 60 Hz
- ▶ 600 watts
- ▶ Output: 13.6 VDC, 40 Amps
- ▶ Dimensions: 4.5" H X 8.625" L X 7.25" W



BATTERY ACCESSORIES: CAPACITORS

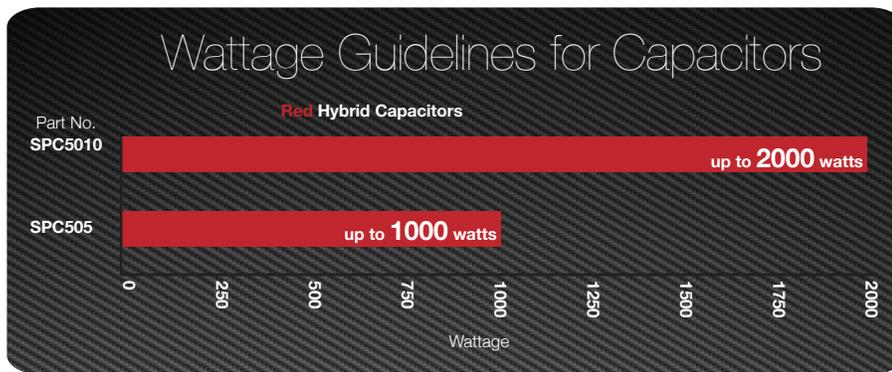

Hybrid Capacitor



SPC5010

- 10 Farads
- 16V -18V Surge
- For Systems Up to 2000 Watts
- Louder & Clearer Bass Response
- Monitor System Voltage
- Stabilizes Battery Voltage
- Minimizes Headlight Dimming
- Similar to a Battery/Capacitor Combo
- Bright 4 Segment Red LED Display
- Accepts (2) 1/0GA or 4GA Inputs / Outputs or Combination of (1) each
- Unique Industrial Styling
- Black Powder Coated Finish • H 2" x L 14 1/4" x W 5 1/8"

SPC505

- 5 Farads
- 16V -18V Surge
- For Systems Up to 1000 Watts
- Louder & Clearer Bass Response
- Monitor System Voltage
- Stabilizes Battery Voltage
- Minimizes Headlight Dimming
- Similar to a Battery/Capacitor Combo
- Bright 4 Segment Red LED Display
- Accepts (2) 1/0GA or 4GA Inputs / Outputs or Combination of (1) each
- Unique Industrial Styling
- Black Powder Coated Finish
- H 2" x L 7 1/2" x W 5 1/8"

BATTERY ACCESSORIES: TERMINALS



SPT55310
Adds side power hook ups to batteries that come with copper-alloy posts, Converts Stinger battery to GM Side Post. Includes short & long style. FITS: SPP1500DC, SPP1500DCR, SPP1300C, SPV69



SHT301
POSITIVE DIGITAL BATTERY TERMINAL
(2) 1/0GA or (2) 4GA Outputs
Positive terminals only
Monitor system voltage
Corrosion resistant satin chrome finish



SHT303
POSITIVE OR NEGATIVE BATTERY TERMINAL
(2) 1/0GA or (2) 4GA Outputs
Corrosion resistant satin chrome finish



SPT53102
POSITIVE BATTERY TERMINAL
(1) 1/0GA (1)4GA and (2) 8GA Output
Multiple output design



SPT53302
NEGATIVE BATTERY TERMINAL
(1) 1/0GA (1)4GA and (2) 8GA Outputs
Multiple output design



SPT53103
POSITIVE BATTERY TERMINAL
Accepts (2) 5/16" Ring terminals
Multiple output design
Works on positive battery post



SPT53303
NEGATIVE BATTERY TERMINAL
Accepts (2) 5/16" Ring terminals
Multiple output design
Works on negative battery post



SPT53502
POSITIVE OR NEGATIVE BATTERY TERMINAL
(1) 1/0GA (2)4GA
Multiple output design
+/- terminals
Oversized set screws
Deep wire recesses



SPT53501
POSITIVE OR NEGATIVE BATTERY TERMINAL
(2) 4GA (1)8GA
Multiple output design
+/- terminals
Oversized set screws
Deep wire recesses



SPT55301
POSITIVE OR NEGATIVE BATTERY TERMINAL
(1) 4GA (1)8GA
Multiple output design
+/- terminals
Oversized set screws
Deep wire recesses
Accepts dual 5/16" ring terminals



SPT55302
POSITIVE OR NEGATIVE BATTERY TERMINAL
(1) 1/0GA (1)4GA and (2) 8GA Outputs
Ideal for use with GM side posts or Stinger batteries (Retains factory connection on GM applications)
+/- terminals



SPT5201
BATTERY/RING TERMINAL
Dual 1/0ga Inputs to 5/16" Ring
Shoc-Krome Terminal



SPT55308
SHORT GM BATTERY POST (+/-)



SPT55309
LONG GM BATTERY POST (+/-)



SQDO
HIGH AMPERAGE QUICK DISCONNECT
0GA
Polarity identification and one-way connection for safety
Add to SPS power supplies for versatility
Sold individually



SQD4
HIGH AMPERAGE QUICK DISCONNECT
4GA
Polarity identification and one-way connection for safety
Add to SPS power supplies for versatility
Sold individually

BATTERY ISOLATORS/RELAYS/TERMINALS



SQD8
HIGH AMPERAGE QUICK DISCONNECT
8GA
Polarity identification and one-way connection for safety
Add to SPS power supplies for versatility
Sold individually



SGP35
HIGH CURRENT ISOLATOR/RELAY 500 AMP
Prevents primary battery discharge
Extends battery life



SGP32
HIGH CURRENT ISOLATOR/RELAY 200 AMP
Prevents primary battery discharge
Extends battery life



SGP38
HIGH CURRENT ISOLATOR/RELAY 80 AMP
Prevents primary battery discharge
Extends battery life



S12023
HIGH CURRENT ISOLATOR
120 AMP 4 Post Design
Prevents primary battery discharge
Maximum current transfer
95-240 Amp High current models



S2402
HIGH CURRENT ISOLATOR
240 AMP 3 Post Design
Prevents primary battery discharge
Maximum current transfer
95-240 Amp High current models



SPTE5131
EXPERT GROUND TERMINAL
Accepts 0GA Wire

SPTE5131B BULK PACK (10 PC)



SPTE5134
EXPERT GROUND TERMINAL
Accepts 4GA Wire

SPTE5134B BULK PACK (25 PC)



SPTE5138
EXPERT GROUND TERMINAL
Accepts 8GA Wire

SPTE5138B BULK PACK (25 PC)



SPTE311210
EXPERT GROUND TERMINAL
BULK PACK (50 PC)
Accepts 12-10GA Wire



SPTE311614
EXPERT GROUND TERMINAL
BULK PACK (100 PC)
Accepts 16-14GA Wire



SPTE312218
EXPERT GROUND TERMINAL
BULK PACK (100 PC)
Accepts 22-1GA Wire

EXPERT GROUND TERMINAL KITS

| | |
|--------------------|------------------|
| SPTEFULLKIT | SPTE51KIT |
| 1X SPTE5131B | 1X SPTE5131B |
| 1X SPTE5134B | 1X SPTE5134B |
| 1X SPTE51838B | 1X SPTE51838B |
| 3X SPTE5138 | 3X SPTE5138 |
| 3X SPTE5134 | 3X SPTE5134 |
| 3X SPTE5131 | 3X SPTE5131 |
| 1X SPTE312218 | |
| 1X SPTE311210 | |
| 1X SPTE311614 | |

SPTE31KIT
1X SPTE312218
1X SPTE311210
1X SPTE311614



SPT5212
SHOC-KROME GROUND TERMINAL 1/0GA
Large surface area for solid ground
Dual mounting holes & tabs



SPT5213
SHOC-KROME GROUND TERMINAL 4GA
Large surface area for solid ground
Dual mounting holes & tabs



SPT524
RING TERMINAL
4GA Input to 5/16" Ring

SPT520
RING TERMINAL
1/0GA Input to 5/16" Ring

TERMINALS / WIRE MANAGEMENT



RING TERMINAL
1/0GA, 5/16" Hole
SPT5101: 2 Pack, (1) Red
(1) Black
SPT5101R: Bulk (25) Red
SPT5101B: Bulk (25) Black




RING TERMINAL
4 GA, 5/16" Hole
SPT5104: 4 Pack, (2) Red (2) Black
SPT5104R: Bulk (25) Red
SPT5104B: Bulk (25) Black



RING TERMINAL
4 GA, 1/4" Hole
SPT5144: 4 Pack, (2) Red (2) Black



RING TERMINAL
8 GA, 5/16" Hole
SPT5108: 4 Pack, (2) Red (2) Black
SPT5108R: Bulk (25) Red
SPT5108B: Bulk (25) Black



FORK TERMINAL
4GA Input with #10 Fork
SPT5124: 4 Pack, (2) Red
(2) Black
SPT5124R: Bulk (25) Red
SPT5124B: Bulk (25) Black




FORK TERMINAL
8 GA Input with #8 Fork
SPT5118: 4 Pack, (2) Red
(2) Black
SPT5118R: Bulk (25) Red
SPT5118B: Bulk (25) Black



IW16PLUG
BANANA PLUG
(8) Red (8) Black Crimp Style



SPT5501
MONO BANANA PLUG
2 Pack
Singer terminal Shoc-Krome,
accepts up to 8GA



SPT5502
DUAL BANANA TERMINAL
Accepts up to 8GA wire
Red



SPT5503
DUAL BANANA TERMINAL
Accepts up to 8GA wire
Black



PG12
GROMMET
4GA
7/8" Mounting hole
4GA waterproof firewall bushing
Watertight seal when power
wires pass through metal
Locks securely as bushing is
tightened



PG34
GROMMET
1/0GA
1" Mounting hole
1/0GA waterproof firewall
bushing
Watertight seal when power
wires pass through metal
Locks securely as bushing is
tightened



SPT5210
WIRE COUPLERS
Joins 1/0GA Wire



SPT5211
WIRE COUPLERS
Joins 4GA Wire



SPT521
GAUGE REDUCER
1/0GA Input to 4GA Pin



SPT522
GAUGE REDUCER
4GA Input to 8GA Pin




SWTOB
WIRE MANAGEMENT CLIPS
1/0GA Wires



SWT4B
WIRE MANAGEMENT CLIPS
4GA Wires

FUSES + FUSE MANAGEMENT



SGI20
RCA ADAPTER
Female to female



SGI21
RCA ADAPTER
Male to male



SGI22
RCA ADAPTER
Right angle male to female



SHD201
ANL FUSE HOLDER
(1) 1/0GA or 4GA Input / (1)
1/0GA or 4GA Output



SPD5201
ANL FUSE HOLDER
Accepts any 5/16" Ring
Terminal



SPD5202
ANL FUSE HOLDER
(1) 4GA Input / (1) 4GA
Output



SPD5203
ANL FUSE HOLDER
(1) 1/0GA or 4GA Input / (1)
1/0GA or 4GA Output



SPD5204
ANL FUSE HOLDER
(1) 0GA Input / (1) 0GA
Output



SPD5210
ANL FUSE HOLDER
(1) 1/0GA Input / (2) 4GA
Outputs



SPD5212
ULTRA HIGH CURRENT ANL
FUSE HOLDER
(1) 1/0GA Input / (1) 1/0GA
Output, Dual fused up to
600A



SHD801
MIDI FUSE HOLDER
(1) 4GA or 8GA Input / (1)
4GA or 8GA Output



SPD5801
MIDI FUSE HOLDER
(1) 4GA or 8GA Input /
(1) 4GA or 8GA Output
Removable base



SHD820
MIDI FUSE HOLDER
(1) 1/0 Gauge or 4 Gauge
input / (2) 4 Gauge or 8
Gauge outputs



SHD821
MIDI FUSE HOLDER
(2) 1/0GA or 4GA Input / (4)
4GA or 8GA Output



SHD822
HIGH AMPERAGE MIDI
FUSE HOLDER
(1) 1/0G or 4GA Input / (1)
4GA or 8GA Output
Dual MIDI fusing for up to
350 amps of current



SHD823
HIGH AMPERAGE MIDI
FUSE HOLDER
(2) 1/0G or 4GA Input / (2)
4GA or 8GA Output
Dual MIDI fusing for up to
350 amps of current

FUSES + FUSE MANAGEMENT



SPD5601
MAXI FUSE HOLDER
(1) 4GA or 8GA Input / (1)
4GA or 8GA Output
Removable base



SFB1MAX
MAXI FUSE HOLDER (BULK
ONLY)
(1) 4GA or 8GA Input / (1)
4GA or 8GA Output



SFB1MAXPT
MAXI FUSE HOLDER (BULK
ONLY)
(1) 4GA or 8GA Input / (1)
4GA or 8GA Output



SPD5621
MAXI FUSE HOLDER
(1) 1/0GA Input / (2) 4GA
Outputs



SPD5622
MAXI FUSE HOLDER
(1) 4GA Input / (2) 8GA
Outputs



SPD5623
MAXI FUSE HOLDER
(2) 1/0GA Inputs / (4) 4GA
Outputs



SPD5625
MAXI FUSE HOLDER
(2) 4GA Inputs / (4) 8GA
Outputs



SPD5101
AGU FUSE HOLDER
(1) 4GA or 8GA Input / (1)
4GA or 8GA Output
Removable base



SPD5120
AGU FUSE HOLDER
(1) 4GA Input / (2) 8GA
Outputs



ANL Fuses (Each):

- SPF5260** 60 Amp
- SPF5280** 80 Amp
- SPF52100** 100 Amp
- SPF52125** 125 Amp
- SPF52150** 150 Amp
- SPF52200** 200 Amp
- SPF52250** 200 Amp
- SPF52300** 300 Amp

MAXI Fuses (3 Pack):

- SPF5620** 20 Amp Bulk Pack (20)
- SPF5630** 30 Amp **SPF5650B** 50 Amp
- SPF5640** 40 Amp **SPF5660B** 60 Amp
- SPF5650** 50 Amp **SPF5670B** 70 Amp
- SPF5660** 60 Amp **SPF5680B** 80 Amp
- SPF5670** 70 Amp **SPF56100B** 100 Amp
- SPF5680** 80 Amp
- SPF56100** 100 Amp



AGU Fuses (5 Pack):

- SPF5130** 30 Amp
- SPF5140** 40 Amp
- SPF5150** 50 Amp
- SPF5160** 60 Amp

- Bulk Pack (20)
- SPF5160B** 60 Amp
 - SPF5180B** 80 Amp



MIDI Fuses (3 Pack):

- SPF5830** 30 Amp
- SPF5840** 40 Amp
- SPF5850** 50 Amp
- SPF5860** 60 Amp
- SPF5870** 70 Amp
- SPF5880** 80 Amp
- SPF58100** 100 Amp
- SPF58125** 125 Amp
- SPF58150** 150 Amp
- SPF58175** 175 Amp



CIRCUIT BREAKERS / DISTRIBUTION BLOCKS



CIRCUIT BREAKERS
 Accepts 1/0GA or 4GA Wire
SGP90300 = 300 Amp
SGP90250 = 250 Amp
SGP90200 = 200 Amp
SGP901501 = 150 Amp
SGP901351 = 135 Amp
SGP901001 = 100 Amp

Easy Reset / Disconnect
 Ultimate Circuit Protection
 Not for constant current applications



CIRCUIT BREAKERS
 Accepts 4GA or 8GA Wire
SGP90801 = 80 Amp
SGP90501 = 50 Amp

Easy Reset / Disconnect
 Ultimate Circuit Protection
 Not for constant current applications



MARINE CIRCUIT BREAKERS
SCBM150 = 150 Amp
SCBM100 = 100 Amp
 Ultimate Circuit Protection
 Easy Reset / Disconnect
 Accepts 5/16 Ring Terminals



SHD20
 DISTRIBUTION BLOCK
 (1) 1/0GA or 4GA Input /
 (2) 4GA or 8GA Outputs



SPD570
 DISTRIBUTION BLOCK
 (1) 4GA or 8GA Inputs for
 Power and Ground
 (2) 4GA or 8GA Outputs
 for Power and Ground



SHD21
 DISTRIBUTION BLOCK
 (2) 1/0GA or 4GA Inputs /
 (4) 4GA or 8GA Outputs



SPD514
 DISTRIBUTION BLOCK
 (2) 1/0GA Inputs / (4) 4GA
 Outputs



SPD513
 DISTRIBUTION BLOCK
 (2) 4GA Inputs / (4) 8GA
 Outputs



SPD515
 DISTRIBUTION BLOCK
 (1) 1/0GA Input / Output /
 (3) 4GA Input/Output



SPD510
 DISTRIBUTION BLOCK
 3 Way 8GA IN / OUT



SPD511
 4GA Input / 4 GA Output
 Distribution T-Block



SPD512
 1/0GA Input / 1/0GA
 Output Distribution T-Block



SPI1000

- 1000W Nominal
- 2000W Surge
- 3 Outlets
- H 2 5/8" x L 11" x W 6"
- Overload and Short Circuit Protection
- High Surge Output for Large Devices
- Audible Low Voltage Alarm and Auto Shutdown
- Temperature Regulated Cooling Fan



SPI500

- 500W Nominal
- 1000W Surge
- 3 Outlets
- H 2 5/8" x L 8.5" x W 6"
- Overload and Short Circuit Protection
- High Surge Output for Large Devices
- Audible Low Voltage Alarm and Auto Shutdown
- Temperature Regulated Cooling Fan



SPI300

- 300W Nominal
- 600W Surge
- Dual Outlets
- H 1 7/8" x L 7 1/8" x W 4"
- Overload and Short Circuit Protection
- High Surge Output for Large Devices
- Audible Low Voltage Alarm and Auto Shutdown
- Temperature Regulated Cooling Fan



SPI160

- 160W Nominal
- 300W Surge
- Single Outlets
- H 1 7/8" x L 5 3/8" x W 4"
- Overload and Short Circuit Protection
- High Surge Output for Large Devices
- Audible Low Voltage Alarm and Auto Shutdown
- Temperature Regulated Cooling Fan

FANS + SIGNAL ADAPTERS



- SGPV2**
GAME PLATE
- Easy Connection of A/V+ Power
 - Left and Right Audio, Video
 - Perfect Addition for SPI1000, SPI500, SPI300 or SPI160
 - Great for X-Box or PlayStation



- SGP12**
VOLT. METER/CHARGER
- High Visibility LED Voltage Meter
 - USB Charger
 - 12 Volt Plug
 - Monitor Alternator Performance



- SVMB**
VOLT. GAUGE
- High Visibility LED Display
 - Auto ON/OFF
 - Simple Three Wire Installation
 - Flush or Surface Mountable
 - H 5/8" x L 2 1/4" x W 1 5/8"



- SVMR**
VOLT. GAUGE
- High Visibility LED Display
 - Auto ON/OFF
 - Simple Three Wire Installation
 - Flush or Surface Mountable
 - H 5/8" x L 2 1/4" x W 1 5/8"



- SGN141**
ADJUSTABLE LINE OUTPUT CONVERTER W/ REMOTE
- 55 Watts per Ch Input / Adjustable Stereo Gain
 - RCA or Speaker Level Input / Output
 - Use to Add Aftermarket Amp or Keep Factory Amplified System
 - Auto Sense Remote Output
 - Converts Speaker Wires to RCA
 - D.C. Isolation for Noise Reduction
 - High Power Models up to 55 watts
 - Precision Stereo Gain Adjustments



- SGN121**
FIXED LINE OUTPUT CONVERTER
- 55 Watts per Ch Input
 - Converts Speaker Wires to RCA
 - D.C. Isolation for Noise Reduction
 - High Power Models up to 55 watts



- SGN111**
FIXED LINE OUTPUT CONVERTER
- 35 Watts per Ch Input
 - Converts Speaker Wires to RCA
 - D.C. Isolation for Noise Reduction
 - High Power Models up to 55 watts



- SGN201**
GROUND LOOP ISOLATOR
- Reversible Inputs for Use at Amplifier or Radio
 - Great for Auxillary Inputs 3.5mm to 3.5mm
 - Reduces Unwanted Noise
 - Retains Sound Quality
 - Full 20Hz-20kHz Audio Transformer Technology
 - Female / Male RCA Inputs / RCA Outputs or 3.5mm to 3.5mm



- SGJ78**
8-1/4" CROSS FLOW FAN
- Draw .19A/Flow 54CFM
 - Sound Level dBA35
 - Easy Installation
 - Low Profile Design with High Flow



- SGJ76**
5" CROSS FLOW FAN
- Draw .22A/Flow 43CFM · Sound Level dBA35
 - Easy Installation
 - Low Profile Design with High Flow



- SGJ34**
5" SQUARE FAN
- Draw .6A/Flow 105CFM



- SGJ32**
2.5" SQUARE FAN
- Draw 13A/Flow 23CFM

CARPET MULTI-PILE

40" wide, 50 yd full roll or 5 yd mini roll



SMPARCH
Parchment




SMCHAR
Charcoal



SMBLK
Black

TRUNK LINER


54" wide, 50 yd full roll or cut in 5 yd increments



STLCHAR
Charcoal




STLHCHAR
Heather Charcoal



STLBLK
Black

ENSEMBLE MULTI-PILE

72" wide, 50 yd full roll or cut in 5 yd increments
(latex backed)



SECHAR
Charcoal




SEBLK
Black

VINYL/SUEDE CARBON FIBER SERIES

54" wide, cut to order



CVFQUICKSILVER
Silver



CFVBLACK
Black

MIAMI SERIES (WIDER GRAIN TEXTURE)

54" wide, 50 yd full roll or cut in 5 yd increments (latex backed)



MIVGREY
Dark Grey



MIVHGBLCK
Black



MIVHMOONL
Light Grey




MIVHIVORY
Tan



MIVAWHT
White

MONTE CARLO SERIES (FINE GRAIN TEXTURE)

54" wide, 50 yd full roll or cut in 5 yd increments




MCVMMANTB




MCVBLK

COMFORT SUEDE

54" wide, 50 yd full roll or cut in 5 yd increments



CSUEDEONYX
Onix



CSUEDECHAR
Charcoal



CSUEDEGREY
Grey

Stinger

STINGER SELECT

Our entry line of high performance audio accessories, Stinger Select, allows customers at any price point to enjoy the benefits of Stinger quality and solutions.

THE STINGER SELECT LINEUP

- ▶ Interconnects
- ▶ CCA Wiring Kits
- ▶ Copper Wiring Kits
- ▶ Wire
- ▶ Batteries
- ▶ Hardware Electronics
- ▶ Enclosures

STINGER SELECT INTERCONNECTS

COMPETITION SERIES

Stinger Select Competition Series interconnects offer excellent sound quality and noise rejection for balanced systems. Tightly twisted and flexible construction with corrosion resistant chrome plated ends. Multiple lengths and Y-connectors available.

| PART # | LENGTH | TYPE |
|----------|------------|----------------------|
| SSRCB1.5 | 1.5Ft/0.5m | Twisted RCA Pair M2M |
| SSRCB3 | 3Ft/0.9m | Twisted RCA Pair M2M |
| SSRCB6 | 6Ft/1.8m | Twisted RCA Pair M2M |
| SSRCB12 | 12Ft/3.7m | Twisted RCA Pair M2M |
| SSRCB15 | 15Ft/4.6m | Twisted RCA Pair M2M |
| SSRCB17 | 17Ft/5.2m | Twisted RCA Pair M2M |
| SSRCB20 | 20Ft/6m | Twisted RCA Pair M2M |
| SSRCB2F | | 2 Female 1 Male |
| SSRCB2M | | 2 Male 1 Female |



PERFORMANCE SERIES

Stinger Select Performance Series Coaxial interconnects offer excellent sound quality for unbalanced systems. Reliable CoAxial construction with corrosion resistant chrome plated ends. Multiple lengths and Y-connectors available.

| PART # | LENGTH | TYPE |
|-----------|------------|-----------------|
| SSPRCA1.5 | 1.5Ft/0.5m | Coaxial RCA M2M |
| SSPRCA3 | 3Ft/0.9m | Coaxial RCA M2M |
| SSPRCA6 | 6Ft/1.8m | Coaxial RCA M2M |
| SSPRCA9 | 9Ft/2.7m | Coaxial RCA M2M |
| SSPRCA12 | 12Ft/3.7m | Coaxial RCA M2M |
| SSPRCA17 | 17Ft/5.2m | Coaxial RCA M2M |
| SSPRCA20 | 20Ft/6m | Coaxial RCA M2M |
| SSPRCA2F | | 2 Female 1 Male |
| SSPRCA2M | | 2 Male 1 Female |



BULK (25/PACK)

Stinger Select Bulk Coaxial interconnects offer quality on a budget. Reliable CoAxial construction with corrosion resistant gold plated ends. Multiple lengths and Y-connectors available.

| PART # | LENGTH | TYPE |
|---------|-----------|-----------------|
| SSIB3 | 3Ft/0.9m | Coaxial RCA M2M |
| SSIB6 | 6Ft/1.8m | Coaxial RCA M2M |
| SSIB12 | 12Ft/3.7m | Coaxial RCA M2M |
| SSIB17 | 17Ft/5.2m | Coaxial RCA M2M |
| SSIB20 | 20Ft/6m | Coaxial RCA M2M |
| SSIBY2F | | 2 Female 1 Male |
| SSIBY2M | | 2 Male 1 Female |



INTERCONNECTS

COMPETITION SERIES

COMPETITION SERIES

- Split Tip Center Pin
- Flexible Jacket
- RCA Twisted Pair - Male to Male



SSRCB1.5
· 1.5Ft/0.5m

SSRCB3
· 3Ft/0.9m

SSRCB6
· 6Ft/1.8m

SSRCB12
· 12Ft/3.7m

SSRCB15
· 15Ft/4.6m

SSRCB17
· 17Ft/5.2m

SSRCB20
· 20Ft/6m

COMPETITION SERIES



SSRCB2F
· 2 Female to 1 Male Split
· Twisted Pair
· Mini ends
· Split Tip Center Pin
· Flexible Jacket

COMPETITION SERIES



SSRCB2M
· 2 Male to 1 Female Split
· Twisted Pair
· Mini ends
· Split Tip Center Pin
· Flexible Jacket

PERFORMANCE SERIES

PERFORMANCE SERIES

- Split Tip
- Flexible Jacket
- RCA - Male to Male
- CoAxial Construction



SSPRCA1.5
· 1.5Ft/0.5m

SSPRCA3
· 3Ft/0.9m

SSPRCA6
· 6Ft/1.8m

SSPRCA9
· 9Ft/2.7m

SSPRCA12
· 12Ft/3.7m

SSPRCA17
· 17Ft/5.2m

SSPRCA20
· 20Ft/6m

PERFORMANCE SERIES



SSPRCA2F
· 2 Female to 1 Male Split
· CoAxial construction
· Mini ends
· Split Tip Center Pin
· Flexible Jacket

PERFORMANCE SERIES



SSPRCA2M
· 2 Male to 1 Female Split
· CoAxial construction
· Mini ends
· Split Tip Center Pin
· Flexible Jacket

INTERCONNECTS BULK + CCA WIRING KITS

BULK COAXIAL INTERCONNECTS 25/BAG

- Gold Plated Ends
- Coaxial Cable Design
- Blue



SSIB3
3Ft/0.9m

SSIB6
6Ft/1.8m

SSIB12
12Ft/3.7m

SSIB17
17Ft/5.2m

SSIB20
20Ft/6m



SSIBY2F
2 Female to 1 Male



SSIBY2M
2 Male to 1 Female Y

SSKO

- 1/0GA 1500W Complete Wiring Kit
- 17Ft/5.2m Matte Blue Ultra Flexible Power Wire (CCA)
 - 3Ft/0.9m Matte Gray Ultra Flexible Ground Wire (CCA)
 - 17Ft/5.2m Twisted Pair RCA Interconnects (OFC)
 - 17Ft/5.2m Blue Remote Turn-on Wire (CCA)
 - 1pc. High Current ANL Fuseholder with 150A Fuse



SSK4ANL

- 4GA 1000W Complete Wiring Kit
- 17Ft/5.2m Matte Blue Ultra Flexible Power Wire (CCA)
 - 3Ft/0.9m Matte Gray Ultra Flexible Ground Wire (CCA)
 - 17Ft/5.2m Twisted Pair RCA Interconnects (OFC)
 - 17Ft/5.2m Blue Remote Turn-on Wire (CCA)
 - 20Ft/6m Matte Blue Ultra Flexible Speaker Wire (CCA)
 - 1pc. High Current ANL Fuseholder with 100A Fuse



SSK8

- 8GA 600W Complete Wiring Kit
- 17Ft/5.2m Matte Blue Ultra Flexible Power Wire (CCA)
 - 3Ft/0.9m Matte Gray Ultra Flexible Ground Wire (CCA)
 - 17Ft/5.2m Twisted Pair RCA Interconnects (OFC)
 - 17Ft/5.2m Blue Remote Turn-on Wire (CCA)
 - 20Ft/6m Matte Blue Ultra Flexible Speaker Wire (CCA)
 - 1pc. High Current Water-resistant MIDI Fuseholder with 60A Fuse



COPPER WIRING KITS

SS2400XS

1/0GA Copper 2400W Complete Wiring Kit

- 17Ft/5.2m Translucent Blue Power Wire
- 17Ft/5.2m Translucent Blue Twisted Pair RCA Interconnects
- 3Ft/0.9m Translucent Silver Ground Wire
- 1pc Satin Plated Battery Terminal
- 16Ft/4.9m Blue Remote Turn-on Wire
- 1pc ANL Fuseholder
- 250A ANL Fuse



SS1200XS

4GA Copper 1200W Complete Wiring Kit

- 17Ft/5.2m Translucent Blue Power Wire
- 3Ft/0.9m Translucent Silver Ground Wire
- 17Ft/5.2m Translucent Blue Twisted Pair RCA interconnects
- 3Ft/0.9m Black flex loom tubing
- 16Ft/4.9m Blue Remote Turn-on Wire
- 20Ft/6m Translucent Speaker Wire
- 1pc ANL Fuseholder
- 100A ANL Fuse



SS600XS

8GA Copper 600W Complete Wiring Kit

- 117Ft/5.2m Translucent Blue Power Wire
- 3Ft/0.9m Translucent Silver Ground Wire
- 17Ft/5.2m Translucent Blue Twisted Pair RCA Interconnects
- 3Ft/0.9m Black flex loom tubing
- 16Ft/4.9m Blue Remote Turn-on Wire
- 20Ft/6m Translucent Speaker Wire
- 1pc AGU Fuseholder
- 60A AGU Fuse



SS300XS

10GA Copper 300W Complete Wiring Kit

- 17Ft/5.2m Translucent Blue Power Wire
- 3Ft/0.9m Translucent Silver Ground Wire
- 17Ft/5.2m Translucent Blue Twisted Pair RCA Interconnects
- 3Ft/0.9m Black flex loom tubing
- 16Ft/4.9m Blue Remote Turn-on Wire
- 20Ft/6m Translucent Speaker Wire
- 1pc ATC Fuseholder
- 30A ATC Fuse



0GA POWER WIRE



SSVLP0BK
1/0GA Matte Black Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 50Ft/15.2m Roll



SSVLP0BL
1/0GA Matte Blue Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 50Ft/15.2m Roll



SSVLP0R
1/0GA Matte Red Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 50Ft/15.2m Roll

4GA POWER WIRE



SSVLP4BK
4GA Matte Black Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 100Ft/30.5m Roll



SSVLP4BL
4GA Matte Blue Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 100Ft/30.5m Roll



SSVLP4R
4GA Matte Red Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 100Ft/30.5m Roll

8GA POWER WIRE



SSVLP8BK
8GA Matte Black Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 250Ft/76.2m/76.2m Roll



SSVLP8BL
8GA Matte Blue Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 250Ft/76.2m Roll



SSVLP8R
8GA Matte Red Power Wire
· CCA Construction
· Vinyl Matte Red
· Soft PVC Insulation
· Heat Resistance
· 250Ft/76.2m Roll

SPEAKER WIRE

12GA SPEAKER WIRE



SSVLS122B
12GA Black Speaker Wire
· CCA Construction
· Vinyl Black
· 250Ft/76.2m Roll



SSVLS12BK
12GA Matte Black Speaker Wire
· Vinyl Matte Black
· 250Ft/76.2m Roll

16GA SPEAKER WIRE



SSVLS165B
16GA Black Speaker Wire
· CCA Construction
· Vinyl Black
· 500Ft/152.4m Roll



SSVLS16BK
16GA Matte Black Speaker Wire
· Vinyl Matte Black
· 500Ft/152.4m Roll

18GA SPEAKER WIRE



SSVLS181B
18GA Black Speaker Wire
· CCA Construction
· Vinyl Black
· 1000Ft/304.8m Roll



SSVLS18BK
18GA Matte Black Speaker Wire
· Vinyl Matte Black
· 1000Ft/304.8m Roll

18GA
PRIMARY
WIRE



SSPW18BK
18GA Black SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18BL
18GA Blue SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18RD
18GA Red SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18BR
18GA Brown SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18GR
18GA Green SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18GY
18GA Gray SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18OR
18GA Orange SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18WH
18GA White SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18PK
18GA Pink SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18PU
18GAPurple SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll



SSPW18YL
18GA Yellow SS Primary Wire
· Multi-Strand CCA
Conductors
· Flexible PVC Jacket
· 500Ft/152.4m Roll

BATTERIES / CAPACITORS / TERMINALS

SSB2000

2000 Watts
 Peak Current: 600A
 Reserve Capacity: 65 minutes 33Ah
 Cyclic Charge Voltage: 14.4V - 14.8V @ 25°C
 Float Charge Voltage: 13.5V - 13.8V @ 25°C
 Terminal Torque: 6.8 Nm max (60 in-lb)
 Weight: 10.86 kg (23.95 lb)
 7.72"W x 5.16"D x 6.10"H



SSB600

600 Watts
 Peak Current: 375A
 Reserve Capacity: 27 minutes 20Ah
 Cyclic Charge Voltage: 14.4V - 14.8V @ 25°C
 Float Charge Voltage: 13.5V - 13.8V @ 25°C
 Terminal Torque: 6.8 Nm max (60 in-lb)
 Weight: 5.98 kg (13.20 lb)
 7.5"H x 7.12"W x 3"D



SSCAP2M

Brushed Aluminum 2 Farad
 Digital Capacitor
 · Satin Finish Terminals
 · UP to 2000W



SSCAP5M

Brushed Aluminum 2 Farad
 Digital Capacitor
 · Satin Finish Terminals
 · UP to 5000W



SSBTGM

GM Short Battery Terminal (+/-)
 · 100% Brass/Satin Finish
 · For Positive or Negative
 · GM Specific



SSBTM

(2) 8GA & (1) 4GA & (1)
 1/0GA Battery Terminal (POS
 or NEG)



SSBT

(2) 8GA & (1) Ring Terminal
 Battery Terminal (POS or NEG)



SSGA104

0 to 4GA Adapter
 · Platinum Nickel Plated Finish
 · Solid Brass Construction



SSGA48

4 to 8GA Adapter
 · Platinum Nickel Plated Finish
 · Solid Brass Construction



SSPRO

1/0 GA Ring Terminal
 · 5/16-Inch Mounting Hole
 Set Screw



SSPR4

4GA Ring Terminal
 · 5/16-Inch Mounting Hole
 Set Screw



SSRT4

4GA Ring Terminal
 · 100% Brass/Satin Finish
 · 5/16-Inch Mounting Hole
 Crimp Style
 · Black or Blue
 · 4 Pack



SSRTO

1/0GA Ring Terminal
 · 100% Brass/Satin Finish
 · 5/16-Inch Mounting Hole
 Crimp Style
 · Black or Blue
 · 2 Pack



SSFANL
1/0 or 4GA ANL Fuseholder
· 100% Brass/Satin Finish



SSFANLW
1/0 or 4GA Water-resistance ANL Fuseholder
· 100% Brass/Satin Finish
· Water-resistant



SSFDB024
(1) 1/0GA Input (2) 4GA Output High Power MIDI Fuse block
· 100% Brass/Satin Finish



SSFM48
4 or 8GA MIDI Inline Fuse Holder
· 100% Brass/Satin Finish



SSDB024
Distribution Block
· 100% Brass/Satin Finish
· (1) 1/0GA Input
· (2) 4GA Output



SSDB2034
Distribution Block
· 100% Brass/Satin Finish
· (2) 1/0GA Input
· (3) 4GA Output



SSDB448
Distribution Block
· 100% Brass/Satin Finish
· (1) 4GA Input
· (4) 8GA Output



SSFDB428
Distribution Block
· 100% Brass/Satin Finish
· (1) 4GA Input
· (2) 8GA Output
· MIDI fuse



SSFDBA428
Distribution Block
· 100% Brass/Satin Finish
· (1) 4GA Input
· (2) 8GA Output
· AGU fuse



SSVLBTP
Positive Battery Terminal
(1) 1/0GA & (1) 4GA &
(2) 8GA Outputs



SSVLBTN
Negative Battery Terminal
(1) 1/0GA & (1) 4GA &
(2) 8GA Outputs



SSVLD48
Distribution Block
· (1) 4GA Input/Output
· (4) 8GA Inputs/Outputs
· Satin Silver Finish



SSFAGU
4 or 8GA AGU Fuseholder
· 100% Brass/Satin Finish
· Water-resistant



SSAFHS
ANL Fuseholder
· Includes snap off cover for quick access to fuse
· Accepts ANL style fuses (not included) from 60A to 300A
· Corrosion Resistant Matte Satin Finish



SSVLANL
1/0 or 4GA ANL Fuseholder
· Satin Silver Finish



SSVLANL2
1/0 or 4GA Water-resistance ANL Fuseholder
· Satin Silver Finish
· Water-resistant

FUSES / CIRCUIT BREAKERS



SSVLAGU
4 or 8GA AGU FUSE HOLDER



**PACKAGED ANL FUSES
1/PACK**

- | | | |
|---|---|---|
| SSANL80S 80A ANL Fuse · Satin Finish | SSANL150S 150A ANL Fuse · Satin Finish | SSANL300S 300A ANL Fuse · Satin Finish |
| SSANL100S 100A ANL Fuse · Satin Finish | SSANL200S 200A ANL Fuse · Satin Finish | |
| SSANL120S 120A ANL Fuse · Satin Finish | SSANL250S 250A ANL Fuse · Satin Finish | |



**PACKAGED AGU FUSES
5/PACK**

- | | |
|---|---|
| SSAGU40S 40A AGU Fuse · Satin Finish | SSAGU70S 70A AGU Fuse · Satin Finish |
| SSAGU50S 50A AGU Fuse · Satin Finish | SSAGU80S 80A AGU Fuse · Satin Finish |
| SSAGU60S 60A AGU Fuse · Satin Finish | |



**MIDI FUSES BULK
10/Pack**

- | | |
|--|--|
| SSMIDI30B · 30A MIDI Fuse Bulk | SSMIDI70B · 70A MIDI Fuse Bulk |
| SSMIDI40B · 40A MIDI Fuse Bulk | SSMIDI80B · 80A MIDI Fuse Bulk |
| SSMIDI50B · 50A MIDI Fuse Bulk | SSMIDI100B · 100A MIDI Fuse Bulk |
| SSMIDI60B · 60A MIDI Fuse Bulk | SSMIDI125B · 125A MIDI Fuse Bulk |
| | SSMIDI150B · 150A MIDI Fuse Bulk |



ANL FUSES BULK

- | | |
|--|--|
| SSANL80BULK · 80A ANL Fuse Bulk (10/Pack) | SSANL200BULK · 200A ANL Fuse Bulk (10/Pack) |
| SSANL100BULK · 100A ANL Fuse Bulk (10/Pack) | SSANL250BULK · 250A ANL Fuse Bulk (10/Pack) |
| SSANL150BULK · 150A ANL Fuse Bulk (10/Pack) | SSANL300BULK · 300A ANL Fuse Bulk (10/Pack) |



SSCB100
100A Circuit Breaker
· Manual trip reset
· High Current Protection



SSCB150
150A Circuit Breaker
· Manual Trip Reset
· High Current Protection



SSCB200
200A Circuit Breaker
· Manual Trip Reset
· High Current Protection



SSCB300
300A Circuit Breaker
· Manual Trip Reset
· High Current Protection



SSGLI
Ground Loop Isolator

- Excellent at reducing most noise in RCA signal paths
- Utilizes proprietary audio transformers for a 1.3dB gain



SSLC
Remote Level Controller

- Adjustable RCA Line Level Control
- Female RCA Input and Output



SSLOC2
2 Channel Line Output Converter

- 10 ohm Input impedance and 10k ohm Output impedance
- Adjustable attenuation for proper balance on both channels



SSLOC35
2 Channel Line Output Converter

- 10 ohm Input impedance and 10k ohm Output impedance
- Adjustable attenuation for proper balance on both channels


ENCLOSURES



SS69HBG

6X9 Hatchback Speaker Enclosure

- Hatchback style 12" W x 8" H x 7" D
- Quick connection terminal cups
- Front loading speaker cutouts
- Enclosures are retail boxed for convenience
- Universal charcoal colored carpeting goes well with many interiors

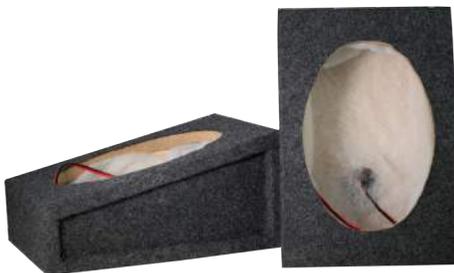

SS69PUG

6X9 Truck Speaker Enclosure

- Truck style 12"H x 3 1/2" D (top) 5" D (bottom) x 8 1/4"
- Quick connection terminal cups
- Front loading speaker cutouts
- Enclosures are retail boxed for convenience
- Universal charcoal colored carpeting goes well with many interiors

A vertical collage of three images. The top image shows a person in a blue swimsuit skydiving against a blue sky with a dotted pattern. The middle image shows the interior of a boat with a yellow steering wheel and a white dashboard. The bottom image shows a close-up of a person's face wearing sunglasses, with a chain bracelet visible on their wrist. The word "Stinger" is written in a large, stylized, white cursive font with a black outline and a registered trademark symbol, centered over the collage.

Stinger®

STINGER SPECIALTY VEHICLES

Amazing sound isn't just for cars. With Stinger you can achieve musical realism on the go, no matter what moves you. Enhance your adventure with Stinger for marine, power sports, and V-twins.

Solutions include speakers, subs, amps and the accessories to help simplify the installation.



STINGER
V-TWIN ACCESSORIES

Stinger[®]



SPX925-HD HARLEY-DAVIDSON DIRECT REPLACEMENT BATTERY

- ▶ Watts: 1850+
- ▶ CCA: 410A
- ▶ Peak Discharge: 2400+ Amps
- ▶ 5 Second Cranking Amps: 925A
- ▶ Internal Resistance: <5.0 mOhms
- ▶ 28Ah
- ▶ 3 Year Full Replacement Warranty
- ▶ Maintains charge for one year while in storage (if fully charged before storage) so you're always ready to ride



Dimensions:

- ▶ (4.92"H x 6.93"W x 6.50"L)
- ▶ (125.5mmH x 176mmW x 165mmL)
- ▶ Weight: 23.59lbs / 10.70kg
- ▶ Replaces the following batteries: 66010-97C, 66010-97B, 66010-97A, 66010-97

SVTRKSG1 + SVTRKRG1 PRE-CUT FAIRING DAMPING KITS

Pre-cut for the perfect fit with:

- ▶ 1998-2013 Harley-Davidson Ultra Classic Street Glide (SVTRKSG1) or
- ▶ 1998-2013 Harley-Davidson Road Glide (SVTRKRG1) fairings

FEATURES:

- ▶ Improved Sound: Optimized bass response and increased amplifier output, annoying squeaks, rattles, and vibrations are absorbed delivering superior sound reproduction
- ▶ Excellent Insulation: Kills composite panel resonance, while increasing audio volume and improving overall frequency response
- ▶ Simplified Installation: Pre-cut to fit the fairing perfectly, the initial tackiness allows for easy application, no surface prep needed
- ▶ High temperature resistance up to 400°
- ▶ 3 Layers of proprietary damping materials for superior performance: acoustic foam, aluminum, and an ultra-dense butyl blend



SPX700X4 4-CHANNEL 700W POWER SPORTS AMPLIFIER



- ▶ 300x2 at 4 Ohms Bridged 175x4 at 2 Ohms 125x2 at 4 Ohms
- ▶ Dimensions: 11.5" L x 4.7" W x 1.6" H
- ▶ Full Range Class D
- ▶ Mounting feet
- ▶ External volume knob with MUTE
- ▶ Aux RCA output (to link to additional amplifiers)
- ▶ Unregulated power supply

SPX350X2 2-CHANNEL 350W POWER SPORTS AMPLIFIER



- ▶ 350x1 at 4 Ohms 175x2 at 2 Ohms 100x2 at 4 Ohms
- ▶ Dimensions: 4.72" L x 5.11" W x 1.6" H
- ▶ Full Range Class D
- ▶ Mounting feet
- ▶ External volume knob with MUTE
- ▶ Aux RCA output (to link to additional amplifiers)
- ▶ Unregulated power supply

Add Bluetooth with iSimple ISBT23 Weather-resistant Bluetooth Receiver

SVT4681

HARLEY-DAVIDSON 2/4 CHANNEL UNIVERSAL AMPLIFIER WIRING KIT Plug-and-Play for 1998 and up Harley-Davidson Touring Motorcycles

- ▶ Pre-cut and loomed power/ ground & speaker wire harnesses
- ▶ Direct fit wiring and fusing with pre-terminated ends with Ferrule connectors
- ▶ Includes OEM connections for interfacing with 2014- up models
- ▶ Works on Street/Electra Glide and Road Glide models
- ▶ 8GA OFC power and ground
- ▶ 16GA speaker wire
- ▶ 60 amp MAXI fuse



HDK001X (PAC) RADIO REPLACEMENT KIT WITH FAIRING CONTROL RETENTION



Designed for select 1998-2013 Harley-Davidsons (FL models with factory fairings) and includes a pre-programmed interface to retain the factory handle bar audio controls, pre-wired installation harness (requires no cutting of any factory wires), two options of frames for the aftermarket radio installation.

BKHDK001 RADIO REPLACEMENT KIT



SINGLE DIN w/ Optional Splash Cover for 1998-2013 HARLEY DAVIDSON

Flip up cover for protection while allowing for easy access

BKHSB200 (BESTKITS) SPEAKER ADAPTERS



Harley-Davidson Speaker Adapters for 1998-2013 Touring Models

Allows installation of 6.5" speakers to factory location



STINGER
MARINE AUDIO + ACCESSORIES

Stinger[®]



MARINE SPEAKERS

UV TESTED Exceeds industry standards for years of durability

SALT & FOG TESTED Battle the harshest elements

PRECISION NON-CORROSIVE TERMINALS Create a solid connection in any environment

SEA65RGS

6.5" COAXIAL SPEAKER WITH BUILT-IN MULTI-COLOR RGB LIGHTING



- ▶ 6.5" 4-ohm two-way speaker system
- ▶ Built-in RGB lighting providing multiple color options and wireless remote
- ▶ Element resistant, marine grade construction
- ▶ 75W RMS / 150W Peak power handling
- ▶ Poly carbon cone with resin coated cloth surround
- ▶ Oversized 1" KSV voice coil
- ▶ Pie dome tweeter
- ▶ Built-in crossover
- ▶ UV treated molded polymer with integrated grills
- ▶ Splash-resistant sealer motors
- ▶ Includes sealing gaskets & installation hardware

SEA65S

6.5" COAXIAL SPEAKER



- ▶ 6.5" 4-ohm two-way speaker system
- ▶ Element resistant, marine grade construction
- ▶ 75W RMS / 150W Peak power handling
- ▶ Poly carbon cone with resin coated cloth surround
- ▶ Oversized 1" KSV voice coil
- ▶ Pie dome tweeter
- ▶ Built-in crossover
- ▶ UV treated molded polymer with integrated grills
- ▶ Splash-resistant sealer motors
- ▶ Includes sealing gaskets & installation hardware

MARINE SUBWOOFERS

UV TESTED Exceeds industry standards for years of durability

SALT & FOG TESTED Battle the harshest elements

PRECISION NON-CORROSIVE TERMINALS Create a solid connection in any environment

SEA12S4

4-OHM 12" SUBWOOFER



- ▶ Peak Power: 300W
- ▶ RMS Power: 150W
- ▶ Polypropylene Mica Injected Cone
- ▶ 75W RMS / 150W Peak power handling
- ▶ Santoprene Surround
- ▶ Fully Marinized Against Salt & Fresh Water Conditions

SEA10S4

4-OHM 10" SUBWOOFER



- ▶ Peak Power: 300W
- ▶ RMS Power: 150W
- ▶ Polypropylene Mica Injected Cone
- ▶ 75W RMS / 150W Peak power handling
- ▶ Santoprene Surround
- ▶ Fully Marinized Against Salt & Fresh Water Conditions

MARINE AMPLIFIERS

SPX700X4

4-CHANNEL 700W MARINE AMPLIFIER



- ▶ 300x2 at 4 Ohms Bridged 175x4 at 2 Ohms 125x2 at 4 Ohms
- ▶ Dimensions: 11.5" L x 4.7" W x 1.6" H
- ▶ Full Range Class D
- ▶ Mounting feet
- ▶ External volume knob with MUTE
- ▶ Aux RCA output (to link to additional amplifiers)
- ▶ Unregulated power supply

SPX350X2

2-CHANNEL 350W MARINE AMPLIFIER



- ▶ 350x1 at 4 Ohms 175x2 at 2 Ohms 100x2 at 4 Ohms
- ▶ Dimensions: 4.72" L x 5.11" W x 1.6" H
- ▶ Full Range Class D
- ▶ Mounting feet
- ▶ External volume knob with MUTE
- ▶ Aux RCA output (to link to additional amplifiers)
- ▶ Unregulated power supply

Add Bluetooth with iSimple ISBT23 Weather-resistant Bluetooth Receiver

MARINE COMPLETE AMPLIFIER INSTALLATION KIT

- ▶ Power Wiring Kit utilizing Marine grade jacket. True Copper for current transfer and tinned conductors for reliability in the harsh marine environment
- ▶ Industry first Siamese Pair dual power and ground wire
- ▶ High Strand Count OFC Hyper-Twist Tinned Conductors
- ▶ Highest Marine Grade - Type III BC5W2 Compliant Marine PVC Jacket, 1050C Dry, 750C wet, Salt, Fog, Oil, Water resistant Exceeds UL1426 Marine Standards
- ▶ Element resistant MIDI fuse holder

- SEA4247** - 4GA 7 meter / 23 feet / 80 amp MIDI fuse
- SEA4243** - 4GA 3 meter / 9.8 feet / 175 amp MIDI fuse
- SEA4287** - 8GA 7 meter / 23 feet / 40 amp MIDI fuse
- SEA4283** - 8GA 3 meter / 9.8 feet / 80 amp MIDI fuse



SEA4247



SEA4287

MARINE BATTERIES

SEA31 GROUP 31



- ▶ 4300 Watts
- ▶ 12v Dry Cell Valve Regulated Lead Acid Battery (AGM)
- ▶ Good for over 400 full discharge cycles
- ▶ Quickly delivers power with an internal resistance of <math><2.2\text{ mOhms}</math>
- ▶ 20 hour rate: 5.25A/105Ah
- ▶ 5 hour rate: 17.8A/89Ah
- ▶ 1/2 hour rate: 130A/65Ah
- ▶ 5 Second Cranking Amps: 2150A
- ▶ CCA: 1050A
- ▶ Peak Discharge: >5000 A

Dimensions:

- ▶ (9.40"H x 13.0"W x 6.80"D)
- ▶ Weight: 74.96 lbs

SEA27 GROUP 27



- ▶ 4300 Watts
- ▶ 12v Dry Cell Valve Regulated Lead Acid Battery (AGM)
- ▶ Good for over 400 full discharge cycles
- ▶ Quickly delivers power with an internal resistance of <math><3.0\text{ mOhms}</math>
- ▶ 20 hour rate: 3.9A/75Ah
- ▶ 5 hour rate: 12.5A/62.5Ah
- ▶ 1/2 hour rate: 109A/54.5Ah
- ▶ 5 Second Cranking Amps: 1750A
- ▶ CCA: 950A
- ▶ Peak Discharge: >3400 A

Dimensions:

- ▶ (8.31"H x 12.09"W x 6.65"D)
- ▶ Weight: 59.56 lbs

2-Channel Interconnects

SMRCA2: 6.6' / 2 Meters

SMRCA4: 13.1' / 4 Meters

SMRCA6: 19.7' / 6 Meters

- Corrosion-Resistant Nickel Plating
- Precision High Rate Twisted-Pair Conductors
- Flexible Marine-Grade PVC Jacket
- Tinned OFC Copper Conductors



3.5mm Audio Input to Female RCA

SMRAUX: 21" / 0.5m

- ▶ Splash-Proof Cover
- ▶ Easy and Secure Mounting with Threaded Body
- ▶ Corrosion-Resistant Plated 3.5mm Audio Jack
- ▶ Flexible Marine-Grade PVC Jacket



3.5mm Audio Input to Male RCA & USB 3.0

SMRAUXUSB3: 21" / 0.5m

- ▶ Splash-Proof Cover
- ▶ Easy and Secure Mounting with Threaded Body
- ▶ Ultra High Speed USB 3.0
- ▶ Corrosion Resistant Plated Flexible Marine-Grade PVC Jacket





S12023
HIGH CURRENT ISOLATOR
120 AMP 4 Post Design
Prevents primary battery discharge
Maximum current transfer
95-240 Amp High current models



S2402
HIGH CURRENT ISOLATOR
240 AMP 3 Post Design
Prevents primary battery discharge
Maximum current transfer
95-240 Amp High current models



SPR200
DUAL BATTERY ISLATOR AND MONITOR
Consists of a BG12 battery guard and a PAC-200 relay.
Designed to isolate the primary battery from the secondary battery, protect the user from battery failure and prolong their battery's lifespan



MARINE CIRCUIT BREAKERS
SCBM150 = 150 Amp
SCBM100 = 100 Amp
Ultimate Circuit Protection
Easy Reset / Disconnect
Accepts 5/16 Ring Terminals
Spark free design



HSBR
20-18GA
Heat Shrink Butt Connectors
3M T-Tap3M Perma-Seal, heat shrink ends lined w/ adhesive to create a Seal bond.



HSBB
16-14GA
Heat Shrink Butt Connectors
3M T-Tap3M Perma-Seal, heat shrink ends lined w/ adhesive to create a Seal bond.




HSBY
12-10GA
Heat Shrink Butt Connectors
3M T-Tap3M Perma-Seal, heat shrink ends lined w/ adhesive to create a Seal bond.



ATC-STYLE FUSE BLOCKS
ATCFB6= 6-way
ATCFB12 = 12-way

POWER WIRE



1/0GA
SHW10B (50Ft/15.2m Roll): Blue
SHW10G (50Ft/15.2m Roll): Gray
SHW10C (50Ft/15.2m Roll): Clear
SPW10TR (50Ft/15.2m Roll): Matte Red
SPW10TB (50Ft/15.2m Roll): Matte Black

4GA
SHW14B20 (20Ft/6.1m Blister): Blue
SHW14C7 (7Ft/2.1m Blister): Clear
SHW14B (100Ft/30.5m Roll): Blue
SHW14G (100Ft/30.5m Roll): Gray
SHW14C (100Ft/30.5m Roll): Clear
SPW14TR (100Ft/30.5m Roll): Matte Red
SPW14TB (100Ft/30.5m Roll): Matte Black
SPW14TR250 (250Ft/76.2m Roll): Matte Red
SPW14TB250 (250Ft/76.2m Roll): Matte Black

8GA
SHW18B20 (20Ft/6.1m Blister): Blue
SHW18C7 (7Ft/2.1m Blister): Clear
SHW18B (250Ft/76.2m Roll): Blue
SHW18G (250Ft/76.2m Roll): Gray
SHW18C (250Ft/76.2m Roll): Clear
SPW18TR (250Ft/76.2m Roll): Matte Red
SPW18TB (250Ft/76.2m Roll): Matte Black
SPW18TR500 (500Ft/152.4m Roll): Matte Red
SPW18TB500 (500Ft/152.4m Roll): Matte Black

10GA
SPW110TR (250Ft/76.2m Roll): Matte Red
SPW110TR500 (500Ft/152.4m Roll): Matte Red
SPW110TB (250Ft/76.2m Roll): Matte Black
SPW110TB500 (500Ft/152.4m Roll): Matte Black

SPEAKER WIRE



10 GA
SHW510G (50 Ft Roll): Gray

12 GA
SPW512BK(250Ft/76.2m Roll): Black
SPW512B (100Ft/30.5m Roll): Blue
SPW512B250 (250Ft/76.2m Roll): Blue
SHW512G (100Ft/30.5m Roll): Gray
SHW512G250 (250Ft/76.2m Roll): Gray

14GA
SHW514B15 (15Ft/4.6m Blister): Blue
SPW514BK (500Ft/152.4m Roll): Black

16 GA
SHW516B50 (50Ft/15.2m Blister): Blue
SHW516B (250Ft/76.2m Roll): Blue

16 GA Cont'd
SHW516B500 (500Ft/152.4m Roll): Blue
SHW516G (250Ft/76.2m Roll): Gray
SHW516G500 (500Ft/152.4m Roll): Gray
SPW516GY (500Ft/152.4m Roll): Gray
SPW516BK (500Ft/152.4m Roll): Black
SPW516WH (500Ft/152.4m Roll): White
SPW516RB (1000Ft/304.8m Roll): Red / Black
SPW516C500 (500Ft/152.4m Roll): Clear
SPW516C (1000Ft/304.8m Roll): Clear

18 GA
SPW518BK1 (1000Ft/304.8m Roll): Black
SPW518C(1000Ft/304.8m Roll): Clear

20 GA
SPW520RB (500Ft/152.4m Roll): Red/Black

BKMCK2000B (Best Kits)



Single DIN retracting marine radio cover

BKMCK2000W (Best Kits)



Single DIN retracting marine radio cover

BKMCK1000B (Best Kits)



Single DIN marine radio cover

BKMCK1000W (Best Kits)



Single DIN marine radio cover

ISBT23 (iSimple)

WEATHER-RESISTANT BLUETOOTH RECEIVER

- ▶ Coated PCB boards for added protection
- ▶ Fully sealed housing for weather proofing
- ▶ Small enough to be installed in limited space
- ▶ 4V RCA output for better sound power
- ▶ Easy two wire installation
- ▶ FCC, Bluetooth and CE certification
- ▶ Bluetooth audio receiver to transmit music from a phone to any car, boat, or motorcycle with an AUX input or direct to amplifier



PCAM-BS1 (EchoMaster)

FLEXIBLE BASE, UNIVERSAL-MOUNT, MARINE-READY BLIND SPOT CAMERA

The flexible base of PCAM-BS1 makes its mounting options limitless. Add extra visibility to your boat where you need it and make maneuvering through the ocean or lake easier and safer. Keep an eye on a water skier, tuber or just eliminate blind spots around your boat.

Key Features:

- ▶ Sensor Type: 1/4" CMOS
- ▶ Min. illumination (LUX): 0.1
- ▶ Viewing Angle: 80°
- ▶ Water/debris-proof Rating: IP67
- ▶ Image (Mirrored/Non-mirrored): Selectable



POWER SPORTS AUDIO + ACCESSORIES

Stinger[®]



POWER SPORTS SPEAKERS

UV TESTED Exceeds industry standards for years of durability

SALT & FOG TESTED Battle the harshest elements

PRECISION NON-CORROSIVE TERMINALS Create a solid connection in any environment

SEA65RGS

6.5" COAXIAL SPEAKER WITH BUILT-IN MULTI-COLOR RGB LIGHTING



- ▶ 6.5" 4-ohm two-way speaker system
- ▶ Built-in RGB lighting providing multiple color options and wireless remote
- ▶ Element resistant, marine grade construction
- ▶ 75W RMS / 150W Peak power handling
- ▶ Poly carbon cone with resin coated cloth surround
- ▶ Oversized 1" KSV voice coil
- ▶ Pie dome tweeter
- ▶ Built-in crossover
- ▶ UV treated molded polymer with integrated grills
- ▶ Splash-resistant sealer motors
- ▶ Includes sealing gaskets & installation hardware

SEA65S

6.5" COAXIAL SPEAKER



- ▶ 6.5" 4-ohm two-way speaker system
- ▶ Element resistant, marine grade construction
- ▶ 75W RMS / 150W Peak power handling
- ▶ Poly carbon cone with resin coated cloth surround
- ▶ Oversized 1" KSV voice coil
- ▶ Pie dome tweeter
- ▶ Built-in crossover
- ▶ UV treated molded polymer with integrated grills
- ▶ Splash-resistant sealer motors
- ▶ Includes sealing gaskets & installation hardware

POWER SPORTS SUBWOOFERS

UV TESTED Exceeds industry standards for years of durability

SALT & FOG TESTED Battle the harshest elements

PRECISION NON-CORROSIVE TERMINALS Create a solid connection in any environment

SEA12S4

4-OHM 12" SUBWOOFER



- ▶ Peak Power: 300W
- ▶ RMS Power: 150W
- ▶ Polypropylene Mica Injected Cone
- ▶ 75W RMS / 150W Peak power handling
- ▶ Santoprene Surround
- ▶ Fully Marinized Against Salt & Fresh Water Conditions

SEA10S4

4-OHM 10" SUBWOOFER



- ▶ Peak Power: 300W
- ▶ RMS Power: 150W
- ▶ Polypropylene Mica Injected Cone
- ▶ 75W RMS / 150W Peak power handling
- ▶ Santoprene Surround
- ▶ Fully Marinized Against Salt & Fresh Water Conditions

POWER SPORTS AMPLIFIERS

SPX700X4 4 CHANNEL 700W POWER SPORTS AMPLIFIER



- ▶ 300x2 at 4 Ohms Bridged 175x4 at 2 Ohms 125x4 at 4 Ohms
- ▶ Dimensions: 11.5" L x 4.7" W x 1.6" H
- ▶ Full Range Class D
- ▶ Mounting feet
- ▶ External volume knob with MUTE
- ▶ Aux RCA output (to link to additional amplifiers)
- ▶ Unregulated power supply

SPX350X2 2 CHANNEL POWER SPORTS AMPLIFIER



- ▶ 350x1 at 4 Ohms 175x2 at 2 Ohms 100x2 at 4 Ohms
- ▶ Dimensions: 4.72" L x 5.11" W x 1.6" H
- ▶ Full Range Class D
- ▶ Mounting feet
- ▶ External volume knob with MUTE
- ▶ Aux RCA output (to link to additional amplifiers)
- ▶ Unregulated power supply

POWER SPORTS BATTERIES

SPX925



Features:

- ▶ Watts: 1850+
- ▶ CCA: 410A
- ▶ Peak Discharge: 2400+ Amps
- ▶ 5 Second Cranking Amps: 925A
- ▶ Internal Resistance: <5.0 mOhms
- ▶ 28Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (4.92"H x 6.93"W x 6.50"L)
- ▶ (125.5mmH x 176mmW x 165mmL)
- ▶ Weight: 23.59lbs / 10.70kg

SPX1200



Features:

- ▶ Watts: 2400+
- ▶ CCA: 560A
- ▶ Peak Discharge: 2600+ Amps
- ▶ 5 Second Cranking Amps: 1200A
- ▶ Internal Resistance: <4.0 mOhms
- ▶ 5 hour rate: 7.48A/37.4Ah
- ▶ Includes Metal Jacket

Dimensions:

- ▶ (6.69"H x 6.54"W x 7.80"L)
- ▶ (170mmH x 166mmW x 198mmL)
- ▶ Weight: 33.29lbs / 15.10kg

SPXRZRBAT2 SECOND BATTERY INSTALLATION KIT FOR 2014+ POLARIS RZR

- ▶ OEM style battery bracket with hardware
- ▶ 200 Amp pre-wired isolator relay
- ▶ 90° RZR battery terminals
- ▶ Compatible with 2-seat and 4-seat models

NOTE: Requires SPX925 Sold Separately



SPXRZR4242

UNIVERSAL 2/4 CHANNEL AMP INSTALLATION KIT FOR OFF-ROAD VEHICLES

Plug-and-Play for 2014+ Polaris RZR

- ▶ Kit Includes under dash amplifier mounting bracket
- ▶ Pre-cut and loomed power/ ground & speaker wire harnesses
- ▶ Fusing and pre-terminated wiring
- ▶ Compatible with 2-seat and 4-seat models
- ▶ 4GA into dual 8GA power / ground wire
- ▶ 16GA speaker wire
- ▶ 150 amp MIDI fuse



2 Channel Interconnects

SMRCA2: 2 Meters

SMRCA4: 4 Meters

SMRCA6: 6 Meters

Corrosion Resistant Nickel Plating

Precision High Rate Twisted-Pair Conductors

Flexible Marine-Grade PVC Jacket

Tinned OFC Copper Conductors



3.5mm Audio Input to Female RCA

SMRAUX: 21"

- ▶ Splash-Proof Cover
- ▶ Easy and Secure Mounting with Threaded Body
- ▶ Corrosion Resistant Plated 3.5mm Audio Jack
- ▶ Flexible Marine Grade PVC Jacket



3.5mm Audio Input to Female RCA & USB 3.0

SMRAUXUSB3: 21"

- ▶ Splash-Proof Cover
- ▶ Easy and Secure Mounting with Threaded Body
- ▶ Ultra High Speed USB3
- ▶ Corrosion Resistant Plated Flexible Marine Grade
- ▶ PVC Jacket





S12023
 HIGH CURRENT ISOLATOR
 120 AMP 4 Post Design
 Prevents primary battery discharge
 Maximum current transfer
 95-240 Amp High current models




S2402
 HIGH CURRENT ISOLATOR
 240 AMP 3 Post Design
 Prevents primary battery discharge
 Maximum current transfer
 95-240 Amp High current models



MARINE CIRCUIT BREAKERS
SCBM150 = 150 Amp
SCBM100 = 100 Amp

Ultimate Circuit Protection
 Easy Reset / Disconnect
 Accepts 5/16 Ring Terminals

POWER WIRE



1/0GA

SHW10B (50Ft/15.2m Roll): Blue
SHW10G (50Ft/15.2m Roll): Gray
SHW10C (50Ft/15.2m Roll): Clear
SPW10TR (50Ft/15.2m Roll): Matte Red
SPW10TB (50Ft/15.2m Roll): Matte Black

4GA

SHW14B20 (20Ft/6.1m Blister): Blue
SHW14C7 (7Ft/2.1m Blister): Clear
SHW14B (100Ft/30.5m Roll): Blue
SHW14G (100Ft/30.5m Roll): Gray
SHW14C (100Ft/30.5m Roll): Clear
SPW14TR (100Ft/30.5m Roll): Matte Red
SPW14TB (100Ft/30.5m Roll): Matte Black
SPW14TR250 (250Ft/76.2m Roll): Matte Red
SPW14TB250 (250Ft/76.2m Roll): Matte Black

8GA

SHW18B20 (20Ft/6.1m Blister): Blue
SHW18C7 (7Ft/2.1m Blister): Clear
SHW18B (250Ft/76.2m Roll): Blue
SHW18G (250Ft/76.2m Roll): Gray
SHW18C (250Ft/76.2m Roll): Clear
SPW18TR (250Ft/76.2m Roll): Matte Red
SPW18TB (250Ft/76.2m Roll): Matte Black
SPW18TR500 (500Ft/152.4m Roll): Matte Red
SPW18TB500 (500Ft/152.4m Roll): Matte Black

10GA

SPW110TR (250Ft/76.2m Roll): Matte Red
SPW110TR500 (500Ft/152.4m Roll): Matte Red
SPW110TB (250Ft/76.2m Roll): Matte Black
SPW110TB500 (500Ft/152.4m Roll): Matte Black

SPEAKER WIRE



10 GA

SHW510G (50 Ft Roll): Gray

12 GA

SPW512BK (250Ft/76.2m Roll): Black
SPW512B (100Ft/30.5m Roll): Blue
SPW512B250 (250Ft/76.2m Roll): Blue
SHW512G (100Ft/30.5m Roll): Gray
SHW512G250 (250Ft/76.2m Roll): Gray

14GA

SHW514B15 (15Ft/4.6m Blister): Blue
SPW514BK (500Ft/152.4m Roll): Black

16 GA

SHW516B50 (50Ft/15.2m Blister): Blue
SHW516B (250Ft/76.2m Roll): Blue

16 GA Cont'd

SHW516B500 (500Ft/152.4m Roll): Blue
SHW516G (250Ft/76.2m Roll): Gray
SHW516G500 (500Ft/152.4m Roll): Gray
SPW516GY (500Ft/152.4m Roll): Gray
SPW516BK (500Ft/152.4m Roll): Black
SPW516WH (500Ft/152.4m Roll): White
SPW516RB (1000Ft/304.8m Roll): Red / Black
SPW516C500 (500Ft/152.4m Roll): Clear
SPW516C (1000Ft/304.8m Roll): Clear

18 GA

SPW518BK1 (1000Ft/304.8m Roll): Black
SPW518C (1000Ft/304.8m Roll): Clear

20 GA

SPW520RB (500Ft/152.4m Roll): Red/Black

ISBT23 (iSimple)

WEATHER-RESISTANT BLUETOOTH RECEIVER

- ▶ Coated PCB boards for added protection
- ▶ Fully sealed housing for weather proofing
- ▶ Small enough to be installed in limited space
- ▶ 4V RCA output for better sound power
- ▶ Easy two wire installation
- ▶ FCC, Bluetooth and CE certification
- ▶ Bluetooth audio receiver to transmit music from a phone to any car, boat, or motorcycle with an AUX input or direct to amplifier



PCAM-150 (EchoMaster)

LIP-MOUNT BLIND SPOT CAMERA

Key Features:

- ▶ Sensor Type: 1/4" CMOS
- ▶ Min. illumination (LUX): 0.1
- ▶ Viewing Angle: 170°
- ▶ Water/debris-proof Rating: IP67
- ▶ Image (Mirrored/Non-mirrored): Selectable
- ▶ Parking Lines: Selectable



Stinger

MERCHANDISING

TRANSFORM YOUR STORE'S INTERIOR

With Stinger, you not only get the products to enhance your audio builds, you also get merchandising options that reinforce your store's value proposition, and assist you with sell-through. Our modular planograms are built for any store, large and small.

WIRE AND BATTERY DISPLAYS



SGM4
3-Tier Battery Rack



SGM1N
Slatwall Wire Rack
7" H x 22.5" W x 14" D



SGM2N
Standing Wire Rack with Locking Wheels
52" H x 24" W x 21" D



SGM9
Tabletop
or Slatwall
Interactive
Display
17" x 17"



SGM8N
Floor Standing Display



SGM4
3-Tier Battery Rack

STINGER STORE TAKEOVER

Easily migrate all of your audio accessories to Stinger, or give your store a total makeover with our large turn-key, bundle pack.

| QUANTITY | PART # | DESCRIPTION |
|----------|----------|--|
| 1 | SK6201 | 1/0GA 6000 Series Power Wire Kit |
| 2 | SK6641 | 4GA 6000 Series Power Wire Kit |
| 2 | SK6681 | 8GA 6000 Series Complete Kit |
| 1 | SK4201 | 1/0GA 4000 Series Power Wire Kit |
| 2 | SK4641 | 4GA 4000 Complete Wire Kit |
| 2 | SK4681 | 8GA 4000 Complete Wire Kit |
| 2 | SI1220 | 20Ft 1000 Series 2CH Coaxial RCA |
| 2 | SI1217 | 17Ft 1000 Series 2CH Coaxial RCA |
| 2 | SI1215 | 15Ft 1000 Series 2CH Coaxial RCA |
| 2 | SI1212 | 12Ft 1000 Series 2CH Coaxial RCA |
| 2 | SI129 | 9Ft 1000 Series 2CH Coaxial RCA |
| 2 | SI126 | 6Ft 1000 Series 2CH Coaxial RCA |
| 2 | SI123 | 3Ft 1000 Series 2CH Coaxial RCA |
| 2 | SI121.5 | 1.5Ft 1000 Series 2CH Coaxial RCA |
| 2 | SI12YF | 1000 Series 1M, 2F Y-Adapter |
| 2 | SI12YM | 1000 Series 1F, 2M Y-Adapter |
| 4 | SGM400 | 25 PK Stinger Re-Order Cards |
| 2 | SI4220 | 20Ft 4000 Series 2CH Twisted Pair RCA |
| 2 | SI4217 | 17Ft 4000 Series 2CH Twisted Pair RCA |
| 2 | SI4417 | 17Ft 4000 Series 4CH Twisted Pair RCA |
| 2 | SI4617 | 17Ft 4000 Series 6CH Twisted Pair RCA |
| 2 | SI4215 | 15Ft 4000 Series 2CH Twisted Pair RCA |
| 2 | SI4212 | 12Ft 4000 Series 2CH Twisted Pair RCA |
| 2 | SI426 | 6Ft 4000 Series 2CH Twisted Pair RCA |
| 2 | SI423 | 3Ft 4000 Series 2CH Twisted Pair RCA |
| 2 | SI42YF | 4000 Series 1M, 2F Y-Adapter |
| 2 | SI42YM | 4000 Series 1F, 2M Y-Adapter |
| 2 | SI8220 | 20Ft 8000 Series 2CH Twisted Pair RCA |
| 2 | SI8217 | 17Ft 8000 Series 2CH Twisted Pair RCA |
| 2 | SI8417 | 17Ft 8000 Series 4CH Twisted Pair RCA |
| 2 | SI8212 | 12Ft 8000 Series 2CH Twisted Pair RCA |
| 2 | SI826 | 6Ft 8000 Series 2CH Twisted Pair RCA |
| 2 | SI823 | 3Ft 8000 Series 2CH Twisted Pair RCA |
| 2 | SI82YF | 8000 Series 1M, 2F Y-Adapter |
| 2 | SI82YM | 8000 Series 1F, 2M Y-Adapter |
| 4 | SGMIN | Slatwall wire Rack |
| 4 | SGM1ST | Wire Rack Sign |
| 1 | SGM4 | Floor Standing Battery Rack |
| 2 | SPD5203 | 0 / 4GA ANL Fuseholder |
| 2 | SPD5210 | ANL Fuseholder 5/16th Ring |
| 2 | SHD801 | MIDI Inline Fuseholder |
| 2 | SHD820 | 2 Pos. 0/4GA In, 4/8GA Out MIDI Distro Block |
| 2 | SHD821 | 4 Pos. 0/4GA In, 4/8GA Out HPM Distro Block |
| 2 | SPD5101 | 4/8GA In/Out AGU Fuseholder |
| 2 | SPD5120 | 4Ga In / 8Ga Out AGU |
| 2 | SPF52100 | 100 Amp ANL Fuse |
| 2 | SPF52150 | 150 Amp ANL Fuse |
| 2 | SPF52200 | 200 Amp ANL Fuse |
| 2 | SPF52250 | 250 Amp ANL Fuse |
| 2 | SPF52300 | 300 Amp ANL Fuse |
| 2 | SPF5850 | 3 PK 50 Amp MIDI Fuse |
| 2 | SPF5860 | 3 PK 60 Amp MIDI Fuse |
| 2 | SPF5880 | 3 PK 80 Amp MIDI Fuse |

| QUANTITY | PART # | DESCRIPTION |
|----------|-----------|---|
| 2 | SPF58100 | 3 PK 100 Amp MIDI Fuse |
| 2 | SPF58125 | 3 PK 125 Amp MIDI Fuse |
| 2 | SPF58150 | 3 PK 150 Amp MIDI Fuse |
| 2 | SPF5180 | 5 PK 80 Amp AGU Fuse |
| 2 | SPF5160 | 5 PK 60 Amp AGU Fuse |
| 2 | SPF5140 | 5 PK 40 Amp AGU Fuse |
| 2 | SPF5130 | 5 PK 30 Amp AGU Fuse |
| 2 | SHD21 | 4 Pos Distribution Block OGA in 4GA Out |
| 2 | SHD20 | 2 Pos Distribution Block OGA in 4GA Out |
| 2 | SPD570 | Power Ground Distribution Block |
| 2 | SPD511 | (3) 4GA Input/Output T-Block |
| 2 | SPD512 | (3) 0GA Input/Output T-Block |
| 2 | SPD515 | (1) 1GA Input / (3) 4GA Output Distribution |
| 2 | SPT5308 | Short GM Battery Terminals |
| 2 | SPT5309 | Long GM Battery Adapter |
| 2 | SPT53102 | (1)1GA, (1)4GA, (2)8GA + Battery Term. |
| 2 | SPT53302 | (1)1GA, (1)4GA, (2)8GA - Battery Term. |
| 2 | SPT53301 | (1)Ring Terminal, (1)8GA, (1)4GA Battery Term |
| 2 | SPT53501 | (1)8GA, (2)4GA +/- Battery Term |
| 2 | SPT521 | 0-4GA Gauge Reducer |
| 2 | SPT522 | 4-8GA Gauge Reducer |
| 2 | SPT520 | 0GA Ring Terminal |
| 2 | SPT524 | 4GA Ring Terminal |
| 2 | SPT5210 | 0GA Wire Coupler |
| 2 | SPT5211 | 4GA Wire Coupler |
| 2 | SPT5101 | 0GA Power Ring Terminal |
| 2 | SPT5104 | 4GA Crimp Ring Terminal |
| 2 | SPT5108 | 8GA Power Ring Terminal |
| 2 | SPT5124 | 4GA Barrier Space #10 |
| 2 | SPT5118 | 8GA Barrier Space #8 |
| 2 | SPT5131 | 0GA Expert Ground Earl Terminal |
| 2 | SPT5134 | 4GA Expert Ground Earl Terminal |
| 2 | SPT5138 | 8GA Expert Ground Earl Terminal |
| 1 | SGP901501 | 150 Amp Circuit Breaker |
| 1 | SPG90200 | 200 Amp Circuit Breaker |
| 2 | SVMB | Blue Digital Voltage Meter |
| 2 | SVMR | Red 3 Digit Voltage Meter |
| 1 | SGP38 | 80 Amp Relay & Battery Isolator |
| 1 | SGP32 | 200 Amp Relay & Battery Isolator |
| 2 | RKX36B | RoadKill Expert Bulk Pack |
| 1 | RKST36B | RoadKill Stealth Bulk Pack |
| 6 | RKX4 | Expert RoadKill Universal |
| 12 | RXKSK | Expert RoadKill Speaker Kit |
| 4 | RKXDK | Expert RoadKill Door Kit |
| 4 | RKXTK | Expert RoadKill Trunk Kit |
| 6 | RKXLIC | RoadKill License Plate Kit |
| 4 | RKINSTALL | Sound Damping Application + Cutting Tool |
| 1 | RKU36 | RoadKill Ultimate Bulk Pack |
| 2 | RK012 | Overkill Foam Damping Mat |
| 1 | RKXHL | RoadKill Hood Liner Kit |
| 4 | RKFR6 | Fast Rings |
| 1 | SGM8N | RoadKill Floor Display |
| 1 | SGM117 | Slatwall Header |
| 1 | SGM118 | Slatwall Header |

ROADKILL SOUND DAMPING



SLATWALL PLANOGRAM PRODUCT

| QTY | PART # | DESCRIPTION |
|-----|-----------|--|
| 2 | RKX36B | RoadKill Expert Bulk Pack |
| 6 | RKX4 | Expert RoadKill Universal |
| 4 | RKXSK | Expert RoadKill Speaker Kit |
| 2 | RKXDK | Expert RoadKill Door Kit |
| 2 | RKXTK | Expert RoadKill Trunk Kit |
| 2 | RKXLIC | RoadKill License Plate Kit |
| 2 | RKINSTALL | Sound Damping Application + Cutting Tool |
| 1 | RK012 | Overkill Foam Damping Mat |
| 4 | RKFR6 | Fast Rings |
| 1 | SGM9 | RoadKill Damping Display |
| 1 | SGM1044 | Slatwall Header |
| 1 | RKU8 | RoadKill Ultimate Bulk Pack |
| 1 | SGM400 | Re-Order Cards |

FLOOR DISPLAY PRODUCT

| QTY | PART # | DESCRIPTION |
|-----|-----------|--|
| 2 | RKX36B | RoadKill Expert Bulk Pack |
| 1 | RKST36B | RoadKill Stealth Bulk Pack |
| 6 | RKX4 | Expert RoadKill Universal |
| 12 | RKXSK | Expert RoadKill Speaker Kit |
| 4 | RKXDK | Expert RoadKill Door Kit |
| 4 | RKXTK | Expert RoadKill Trunk Kit |
| 6 | RKXLIC | RoadKill License Plate Kit |
| 4 | RKINSTALL | Sound Damping Application + Cutting Tool |
| 1 | RKU36 | RoadKill Ultimate Bulk Pack |
| 2 | RK012 | Overkill Foam Damping Mat |
| 1 | RKXHL | RoadKill Hood Liner Kit |
| 4 | RKFR6 | Fast Rings |
| 1 | SGM400 | Re-Order Cards |



SGM104N
Slatwall Header



SGM9
Tabletop or Slatwall Interactive Display
17" x 17"



SGMRK
Tabletop or Slatwall Material Display
14" x 14"



SGM8N
Floor Standing Display

MODULAR INTERCONNECTS + WIRING KIT PLANOGRAM

Purchase as a complete planogram, or purchase the Series sections alone to build a customized planogram.



| QUANTITY | PART # | DESCRIPTION |
|----------|-------------|---------------------------------------|
| 2 | SI921.5 | 1.5Ft 9000 Premium Interconnect |
| 2 | SI9220 | 20Ft 9000 Series Premium Interconnect |
| 2 | SI9217 | 17Ft 9000 Series Premium Interconnect |
| 2 | SI8417 | 17Ft 9000 Series Premium Interconnect |
| 2 | SI9212 | 12Ft 9000 Series Premium Interconnect |
| 2 | SI926 | 6Ft 9000 Series Premium Interconnect |
| 2 | SI923 | 3Ft 9000 Series Premium Interconnect |
| 2 | SI92YF | 9000 Series 1M, 2F Y-Adapter |
| 2 | SI92YM | 9000 Series 1F, 2M Y-Adapter |
| 1 | SI92DISPLAY | 9000 Series Counter/Slat Display |

9000 Series
RCA
Bundle

| | QUANTITY | PART # | DESCRIPTION |
|------------------------|----------|---------|---------------------------------------|
| 6000 Series Kit Bundle | 1 | SK6201 | 1/0GA 6000 Series Power Wire Kit |
| | 2 | SK6641 | 4GA 6000 Series Power Wire Kit |
| | 2 | SK6681 | 8GA 6000 Series Complete Kit |
| | 1 | SGM117 | Slatwall Header |
| 4000 Series Kit Bundle | 1 | SK4201 | 1/0GA 4000 Series Power Wire Kit |
| | 2 | SK4641 | 4GA 4000 Complete Wire Kit |
| | 2 | SK4681 | 8GA 4000 Complete Wire Kit |
| | 1 | SGM117 | Slatwall Header |
| 1000 Series RCA Bundle | 2 | SI1220 | 20Ft 1000 Series 2CH Coaxial RCA |
| | 2 | SI1217 | 17Ft 1000 Series 2CH Coaxial RCA |
| | 2 | SI1215 | 15Ft 1000 Series 2CH Coaxial RCA |
| | 2 | SI1212 | 12Ft 1000 Series 2CH Coaxial RCA |
| | 2 | SI129 | 9Ft 1000 Series 2CH Coaxial RCA |
| | 2 | SI126 | 6Ft 1000 Series 2CH Coaxial RCA |
| | 2 | SI123 | 3Ft 1000 Series 2CH Coaxial RCA |
| | 2 | SI121.5 | 1.5Ft 1000 Series 2CH Coaxial RCA |
| | 2 | SI12YF | 1000 Series 1M, 2F Y-Adapter |
| | 2 | SI12YM | 1000 Series 1F, 2M Y-Adapter |
| | 1 | SGM400 | 25 PK Stinger Re-Order Cards |
| | 1 | SGM117 | Slatwall Header |
| 4000 Series RCA Bundle | 2 | SI4220 | 20Ft 4000 Series 2CH Twisted Pair RCA |
| | 2 | SI4217 | 17Ft 4000 Series 2CH Twisted Pair RCA |
| | 2 | SI4417 | 17Ft 4000 Series 4CH Twisted Pair RCA |
| | 2 | SI4617 | 17Ft 4000 Series 6CH Twisted Pair RCA |
| | 2 | SI4215 | 15Ft 4000 Series 2CH Twisted Pair RCA |
| | 2 | SI4212 | 12Ft 4000 Series 2CH Twisted Pair RCA |
| | 2 | SI426 | 6Ft 4000 Series 2CH Twisted Pair RCA |
| | 2 | SI423 | 3Ft 4000 Series 2CH Twisted Pair RCA |
| | 2 | SI42YF | 4000 Series 1M, 2F Y-Adapter |
| | 2 | SI42YM | 4000 Series 1F, 2M Y-Adapter |
| | 1 | SGM400 | 25 PK Stinger Re-Order Cards |
| | 1 | SGM117 | Slatwall Header |
| 6000 Series RCA Bundle | 2 | SI6220 | 20Ft 6000 Series 2CH Twisted Pair RCA |
| | 2 | SI6217 | 17Ft 6000 Series 2CH Twisted Pair RCA |
| | 2 | SI6212 | 12Ft 6000 Series 2CH Twisted Pair RCA |
| | 2 | SI623 | 3Ft 6000 Series 2CH Twisted Pair RCA |
| | 2 | SI627F | 6000 Series 1M, 2F Y-Adapter |
| | 2 | SI62YM | 6000 Series 1F, 2M Y-Adapter |
| | 1 | SGM400 | 25 PK Stinger Re-Order Cards |
| | 1 | SGM117 | Slatwall Header |
| 8000 Series RCA Bundle | 2 | SI8220 | 20Ft 8000 Series 2CH Twisted Pair RCA |
| | 2 | SI8217 | 17Ft 8000 Series 2CH Twisted Pair RCA |
| | 2 | SI8417 | 17Ft 8000 Series 4CH Twisted Pair RCA |
| | 2 | SI8212 | 12Ft 8000 Series 2CH Twisted Pair RCA |
| | 2 | SI826 | 6Ft 8000 Series 2CH Twisted Pair RCA |
| | 2 | SI823 | 3Ft 8000 Series 2CH Twisted Pair RCA |
| | 2 | SI82YF | 8000 Series 1M, 2F Y-Adapter |
| | 2 | SI82YM | 8000 Series 1F, 2M Y-Adapter |
| | 1 | SGM400 | 25 PK Stinger Re-Order Cards |
| | 1 | SGM117 | Slatwall Header |

Stinger

A Power Brand of AAMP Global
Global HQ: 15500 Lightwave, Clearwater, FL 33760
In the US: 1-800-477-2267 | support@aampglobal.com
Outside of the US: technical.eu@aampglobal.com

StingerElectronics.com
Facebook.com/StingerElectronics