

CAM-LF2



## Full Frame License Plate Reverse Camera User Manual



EchoMaster.com  
EchoMaster is a Power Brand of AAMP Global



15500 Lightwave Drive, Suite 202  
Clearwater, Florida 38760  
email - support@aampglobal.com (US)  
email - technical.eu@aampglobal.com (Europe)



## Introduction

Thank you for purchasing your EchoMaster automotive camera.

The following part numbers are supported:  
▶ CAM-LF2B-N ▶ CAM-LF2C-N

EchoMaster cameras are designed to improve safety during driving by providing high quality images of surrounding areas and obstacles in the vicinity of the vehicle. They will also improve vehicle maneuvering capability by displaying blind spots not normally visible to the driver.

Please ensure you read and understand all aspects of this manual before fitting or using your EchoMaster Camera. Choose a suitable mounting place dependent on the application. Ensure that there are no wiring harnesses or hoses/pipes located behind this panel before drilling.


## Key Features

- ▶ 1/4" CMOS Sensor
- ▶ Operates at 0 LUX
- ▶ 8 IR LEDs
- ▶ IP67 Rated
- ▶ 140 Degree Viewing Angle
- ▶ Selectable Image (mirrored/non-mirrored)

## Box Contents

- ▶ Camera
- ▶ Manual
- ▶ Wiring Harness
- ▶ Mounting Hardware

## Dimensions

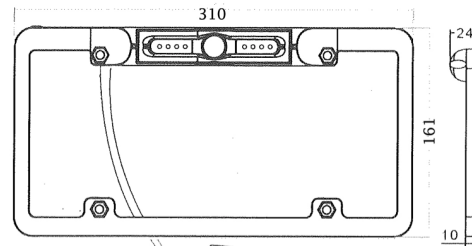

## Specifications

	CAM-LF2B-N / CAM-LF2C-N
Sensor	1/4" CMOS
LEDs	8
Illumination	0 LUX
Viewing Angle	140 degrees
Mirror Image	YES
Normal Image	YES
Water/Debris-Proof	IP67
Audio	NO
Power Supply	12V DC
Current	<110mA
Working Temperature	-20°C - +50°C
Dimensions (mm)	D (27) x W (310) x H (160)
System	NTSC
TV Lines	380
Resolution (HxV)	640 X 480

## Wiring Diagram & Pin Out

