

FSP-8

8-channel sound processor
High-resolution digital input
Precise, real-time control thanks to the FSP-8 DSP Manager



• 6 high/low-level analogue inputs
+ auxiliary analogue stereo input

• 8 analogue outputs - 3.4 Volts

• Optical input
24 bits/192kHz

• Remote control
(sold separately)

TECHNICAL SPECIFICATIONS

Selectable high/low-level inputs for compatibility with factory
or after-market head units
High-resolution digital input (24 bits/192kHz)



Auxiliary stereo input
Remote control with LED screen (sold separately)
Dimensions (WxLxH): 57/16"x89/16"x17/8" (13.8cmx21.8cmx4.8cm)

WHAT MAKES THE DIFFERENCE

- High-resolution digital compatibility via optical inputs.
- Recall of stored presets and main settings management through the remote control (sold separately).
- FSP-8 DSP MANAGER: User-friendly interface for maximum efficiency when sculpting "Your Focal Sound".

DOWNLOAD FOR WINDOWS

FSP-8 DSP MANAGER:
Software compatibility: Windows Xp/Vista/Seven/8/10

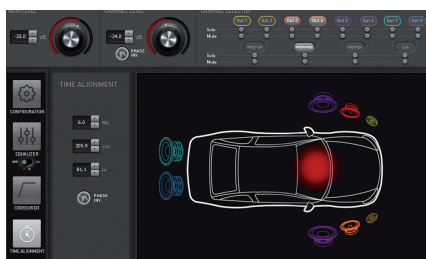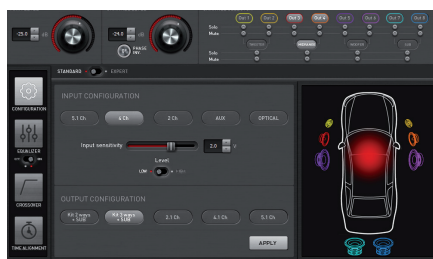

 **Performance**
CREATE YOUR SOUND

 **FOCAL**
THE SPIRIT OF SOUND