

SLI - SPEAKER LEVEL INTERFACE

CODE..... 64107000
 DESCRIPTION..... SLI 2 - Speaker level interface
 2 channels
 COLOUR..... Silver painting and traslucent black
 SIZE..... B x H x W
 SET..... 1 pc
 PACKAGING..... Blister
 INNER CARTON 8 pcs
 OUTER CARTON 32 pcs

SLI 2




SLI 4

CODE..... 64107015
 DESCRIPTION..... SLI 4 - Speaker level interface
 4 channels
 COLOUR..... Silver painting and traslucent black
 SIZE..... B x H x W
 SET..... 1 pc
 PACKAGING..... Blister
 INNER CARTON 4 pcs
 OUTER CARTON 16 pcs

SLI 4

Input power max	25 W
Stepdown	4:1
T.H.D.	100 Hz - 0.7 % 1 KHz - 0.15 % 10 KHz - 0.2 %
Bandwidth (-3db)	15 Hz ÷ 75 KHz
S/N ratio	>107 dB
Crosstalk	>55 dB (10 KHz)
Input impedance	100 Ohm
Output impedance	10 KOhm
VDC	8 ÷ 15 VDC
Remote Out	12 VDC - 100 mA
Size (BxHxW) mm	SLI 2 59x30x98 SLI 4 99x30x108

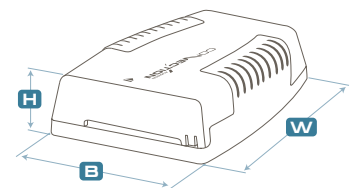

SLI2; input terminal with low contact resistance



SLI2; RCA chroded output




SLI4; input terminal with low contact resistance




SLI4; RCA chroded output

SLI 2

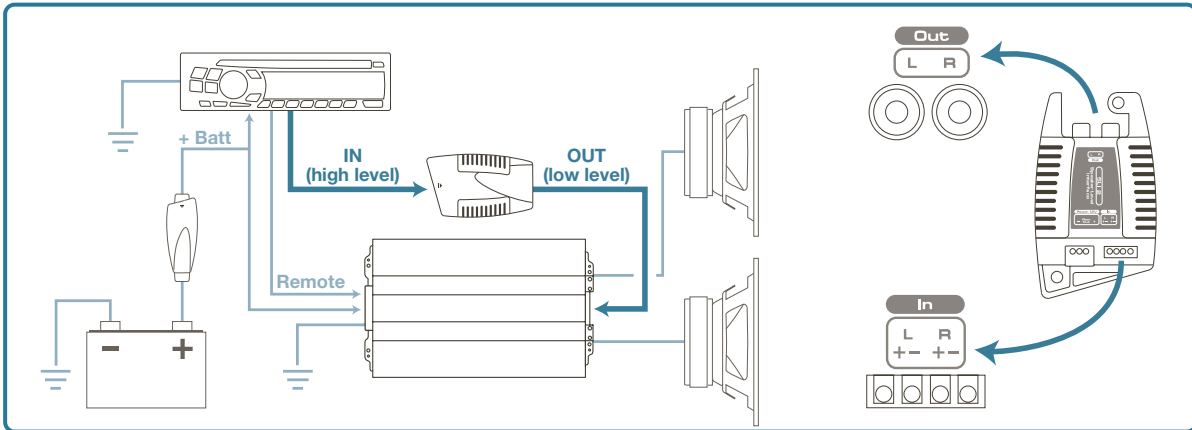

SLI 4

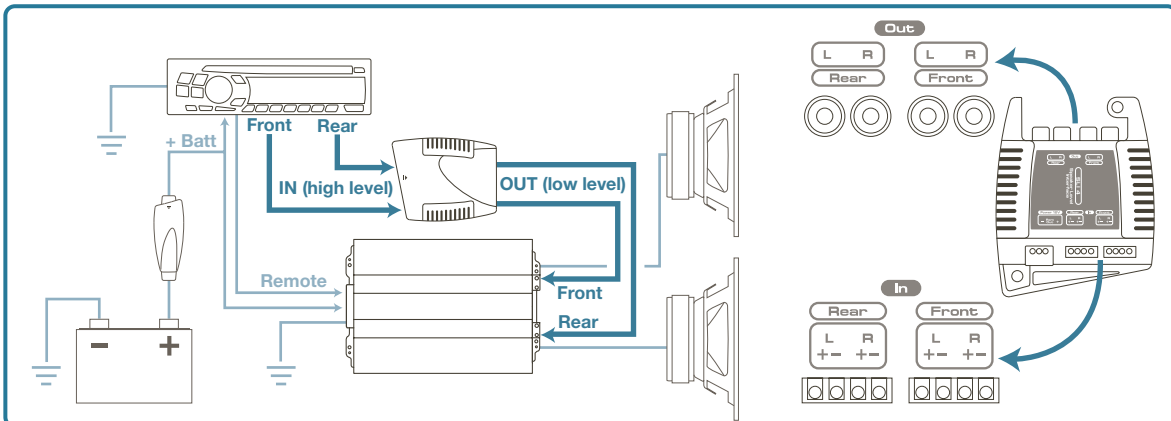

ART™ (Automatic Remote Turn-On)

